

Diamond Cutting Inserts



Die and Mold

Industry



Automotive

Mechanical Engineering




Medical Technology

Micro Technology



Aerospace

Engineering



About us

Diamond Tooling Systems



Welcome to DTS - Diamond Tooling Systems GmbH!

Based in Kaiserslautern - Germany - we have specialized in the development, production and distribution of precision tools equipped with ultrahard cutting materials, such as PCD (polycrystalline Diamond), CVD-D (CVD thickfilm Diamond), UltraDiamond (monocrystalline binderless Diamond) and CBN (cubic boron nitride). As a leading manufacturer for tools with lasered cutting edges, we offer machining solutions in the areas of turning, milling, grooving, drilling, reaming, threading, and tool holding.

To be able to economically process ultra-hard cutting materials such as PCD, CVD-D and CBN on precision tools werealized early on that we would have to move away from the traditional production technology of „grinding“ to new technologies such as the „laser removal process“. This decision has contributed to the fact that our customers regard us, DTS GmbH, as the pioneer and leading manufacturer of lasered tools for machining.

Ultra-hard high-performance cutting materials have a key function in Metal-cutting manufacturing. Precision toolsequipped with ultra-hard cutting materials are products that require a great deal of explanation. The economical use of the cutting materials is only ensured if the machining process and the cutting material are coordinated with each other.

This is exactly where we at DTS - Diamond Tooling Systems GmbH - step in: Tools and processes are subjected toa comprehensive analysis by our experienced application engineers. Subsequently, the new process optimization is presented to the customer and in the next step, it is implemented in their production. Only in that way is it possible to exploit the optimum potential of our high-tech cutting materials.

Our experienced application engineers are also available to advise you during ongoing production. This close cooperation and mutual trust is the basis of our success.

With more than 25 years of optimization experience in the processing industry, this is where we see our strength!

Contents

Diamond Indexable Inserts

Overview

Ultrahard Cutting Materials at a Glance	04
Our Cutting Materials and their main areas of application	06
Our Cutting Material allocation according for Material use	07
3D - lasered Micro Chip Grooves	08
Wiper inserts, mode of operation	09
Application examples - our Cutting edges in use	10
ISO Code	11
CCGT - positive Rake Angle and Chip Breaker	12
CCGW - neutral	16
CDGW - neutral	18
CNGA - neutral	19
CPGT - positive Rake Angle and Chip Breaker	20
CPGW - neutral	22
DCGT - positive Rake Angle and Chip Breaker	24
DCGW - neutral	26
DCGW - Standard and Wiper - R / L for Face Turning	27
DCGW - Wiper - Right and Left for Side Turning	28
DCGT - Wiper with Chip Breaker for Side Turning	29
DNGA - neutral	31
DXGW - neutral	32
EPGW - neutral	33
RBGN - neutral	34
RCGW - neutral	35
SCGT - Positive Rake Angle	36
SCGW - neutral	36
TCGT - Positive Rake Angle and Chip Breaker	38
TCGW - neutral	42
TPGN - neutral	44
TPGW - neutral	45
VBGT - Positive Rake Angle	46
VBGW - neutral	47
VCGT - Positive Rake Angle and Chip Breaker	48
VCGW - neutral	50
VXGW - neutral	51
WCGW - neutral	52


Technical Attachment

Cutting Data	54
Formulary	58

PASSION FOR DIAMOND...

ultrahard cutting materials at a glance

... is not just a slogan for us - we live this passion in our daily dealings with our customers and we are your partner when it comes to Diamond or CBN tools.

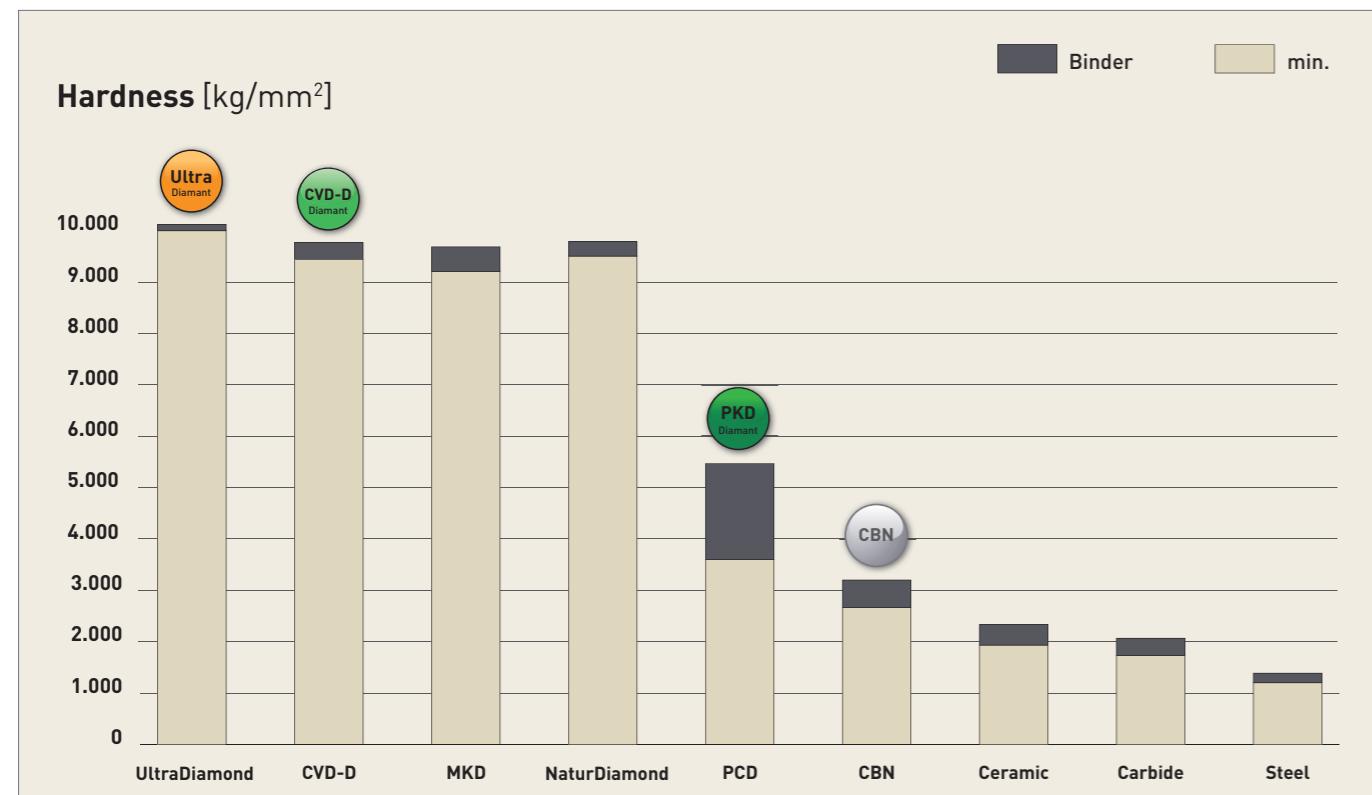

Polycrystalline Diamond (PCD)

The well-known standard Diamond

PCD is a synthetically produced, extremely tough, intergrown mass of Diamond particles with random orientation in a Metal matrix. It is produced by sintering selected Diamond particles at high pressure and high temperatures. Graphite is used as a catalyst so that the PCD crystals grow together. PCD has high thermal conductivity and good heat dissipation from the cutting area. In addition, PCD has the highest bending strength of all cutting materials.

PCD is very well suited for machining aluminium with a Si content of up to 10% and/or other abrasive fillers. The hot hardness is approx. 750°C, the areas of application are similar to those of CVD thick film Diamond, but the high efficiency of CVD thick film Diamond comes into its own with hard-brittle materials or aluminium with a Si content of 10% or more.

CVD thick film Diamond (CVD-D)

The star among Diamond Cutting Materials

For machining hard-brittle materials such as ceramics, glass, glass-ceramics, hard Metal, MMC and fibre composites such as CFK and GFK. Due to the lack of a bonding matrix, the Diamond content is much higher than with PCD. In the group of ultra-hard cutting materials, the binderless CVD-D is one of the hardest, artificially artificially produced Diamond cutting materials.

CVD-D is characterised by high hardness and high wear resistance. These properties make CVD-D the perfect cutting material for machining abrasive materials. Compared to PCD, which is damaged by the abrasive particles due to its soft metallic binder phase, the CVD-D cutting edge remains stable due to its binderless anchoring in the Diamond matrix.

If CVD-D is used correctly, the service life can be increased by up to 10 times (and even more) compared to PCD!

Binderless Diamond (UltraDiamond)

The hardest single Crystal

Single-crystal elements are laser-cut from Diamond blanks in a defined orientation using laser segmentation technology. This new technology makes it possible, in addition to polycrystalline cutting materials such as PCD and CVD-D, to also braze a monocrystal (UltraDiamond) under high vacuum on any tool carrier. Compared to PCD, the tool life can be increased by approx. 15 to 25 times and compared to CVD-D by approx. 2 to 5 times.

The areas of application are similar to PCD and CVD-D, but this monocrystalline cutting material offers a further significant increase in tool life in all applications where PCD and CVD-D reach the limits of economic viability. The UltraDiamond cutting material makes economical machining of very hard, highly brittle materials such as Ceramics, glass, glass-Ceramics and hard metals with low cobalt binder and nickel binder (<10%) possible. Ceramics, glass, glass-ceramics and hard metals with low cobalt binder and nickel binder (<10%).

Polycrystalline Diamond (PCD)

The well-known standard Diamond

PCD is a synthetically produced, extremely tough, intergrown mass of Diamond particles with random orientation in a Metal matrix. It is produced by sintering selected Diamond particles at high pressure and high temperatures. Graphite is used as a catalyst so that the PCD crystals grow together. PCD has high thermal conductivity and good heat dissipation from the cutting area. In addition, PCD has the highest bending strength of all cutting materials.

PCD is very well suited for machining aluminium with a Si content of up to 10% and/or other abrasive fillers. The hot hardness is approx. 750°C, the areas of application are similar to those of CVD thick film Diamond, but the high efficiency of CVD thick film Diamond comes into its own with hard-brittle materials or aluminium with a Si content of 10% or more.

Polycrystalline Cubic Boron Nitride (CBN)

Chemically resistant and stable at high temperatures

CBN is stable up to 1,400°C. Boron nitride powder is the starting point for the production of CBN, which has been available since the late 1960s. It is produced under high pressure as well as at temperatures of over 1,500°C and is specially adapted to the final application through many different substrates.

Today, CBN is considered the second hardest material after Diamond cutting materials!

The applications of CBN are in the automotive industry, aerospace, tool and mould making and mechanical engineering. The wide spectrum as a cutting and abrasive material includes hardened Steels, Cast Iron, chilled Cast Iron, sintered materials, stellite, nickel and cobalt-based superalloys. In many applications, cubic boron nitride is preferred over Diamond cutting materials because it is absolutely stable in air at temperatures up to 1,400°C. Diamond, on the other hand, starts to decompose at a temperature of about 750°C.


Compared to PCD, CBN is also characterised by its chemical resistance to ferrous materials.

Our Cutting Materials

and their main areas of application at a glance

We want to offer you the ideal solution for your application. Therefore, we also offer you a wide range of cutting materials on our internal turning tools.


Below you will find an overview of the different cutting materials.



PCD

is ideally suited for the machining of *

Aluminium <10% Si | Graphite | Ceramic green compact | Copper |
Copper Alloy | Magnesium | Brass | PEEK | Tungsten Alloy



CVD-D

is ideally suited for the machining of *

Acrylic (PMMA) | Aluminium >10% Si | Glass, GlassCeramic | Carbide >10%Co |
Ceramic | Plastics | Copper, Copper Alloys | Magnesium |
Silver, Gold, Platinum | Titanium | Composites (CFRP, GFRP) | Zirconium



UltraDiamond

is ideally suited for the cutting of *

Acryl (PMMA) | Glas, GlasCeramic | Carbide <12%Co | Ceramic

Our Cutting Material Assignment

about the materials

You can't find your material in the table?

We will be happy to help you by phone or e-mail!

Tel.: +49(0)6301 32011-0

Mail: info@Diamond-toolingsystems.com

ISO	Materials	1. Choice	Alternative	DTS Diamond Types		
		<input checked="" type="radio"/>	<input type="radio"/>	PCD	CVD-D	Ultra Diamond
N	Acryl (PMMA)				<input type="radio"/>	<input checked="" type="radio"/>
	Aluminium, < 10% Si	<input checked="" type="radio"/>			<input type="radio"/>	
	Aluminium, > 10% Si		<input checked="" type="radio"/>		<input type="radio"/>	<input type="radio"/>
	Glas, GlasCeramic		<input type="radio"/>		<input type="radio"/>	<input checked="" type="radio"/>
	Carbide (Green)	<input checked="" type="radio"/>		<input type="radio"/>		
	Carbide G-Type, < 12% Co		<input type="radio"/>		<input type="radio"/>	<input checked="" type="radio"/>
	Carbide G-Type, > 10% Co		<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	
	Carbide K-Type, < 12% Co		<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	
	Carbide K-Type, > 10% Co		<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	
	Carbide with Ni Binder				<input type="radio"/>	<input checked="" type="radio"/>
	Ceramic	<input checked="" type="radio"/>		<input type="radio"/>	<input type="radio"/>	
	Ceramic (Green)	<input checked="" type="radio"/>		<input type="radio"/>		
	Plastics	<input type="radio"/>	<input checked="" type="radio"/>			
	Copper, Copper Alloys	<input checked="" type="radio"/>		<input type="radio"/>		
	Magnesium	<input type="radio"/>	<input checked="" type="radio"/>			
	Brass	<input checked="" type="radio"/>		<input type="radio"/>		
	MMC	<input type="radio"/>	<input checked="" type="radio"/>			
	PEEK	<input checked="" type="radio"/>		<input type="radio"/>	<input type="radio"/>	
	Silver, Gold, Platinum		<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	
	Composite Materials like CFK/GFK	<input type="radio"/>	<input checked="" type="radio"/>			
	Tungsten Alloy	<input type="radio"/>	<input checked="" type="radio"/>			

DTS cutting materials are successfully used in many industries:

- Mechanical Engineering
- Die and Mold Industry
- Automotive
- Aerospace
- Medical Technology
- Optical Industry
- Ceramic Industry



3D - gelaserte Micro Chip Breaker

for optimized chip control

Diamond tools are the first choice for machining aluminium and magnesium alloys, lead-free brass and a wide variety of plastic composites. However, these long-chipping materials are always subject to chip problems.


Our laser technology enables us to insert 3D micro chip breakers into a wide variety of PCD, CVD-D and CBN tools. This special laser ablation process allows us to design complex chipbreaker shapes and achieve excellent chip control.



A lasered 3D micro chip breaker enables controlled chip breaking or chip guidance for most long-chipping materials. In addition, the chip breaker minimises the cutting pressure, which enables the machining of thin-walled components.

For controlled chip breaking, we offer you two different 3D-Micro chip breaker levels:

- Chip Breaker-F (sharp cutting edge for finishing chip)
- Chipbreaker-R (stable cutting edge for roughing chip)

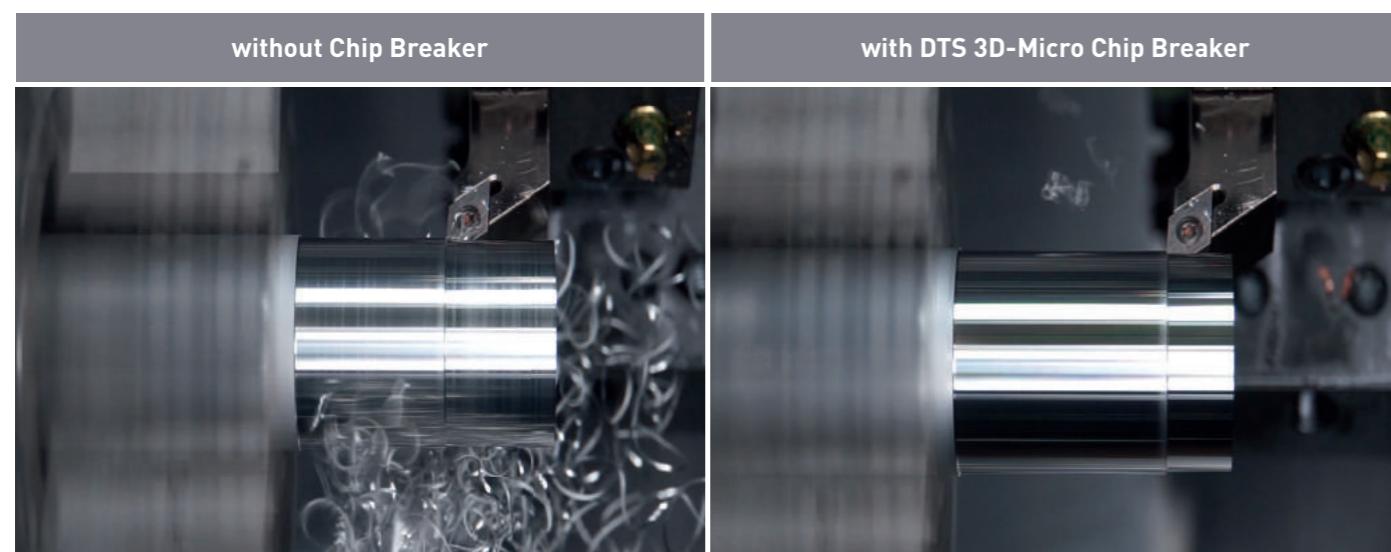


Material: AlSi1

Material: AlSi1

Wiper Cutting Inserts

Functionality

Wiper Cutting Inserts:

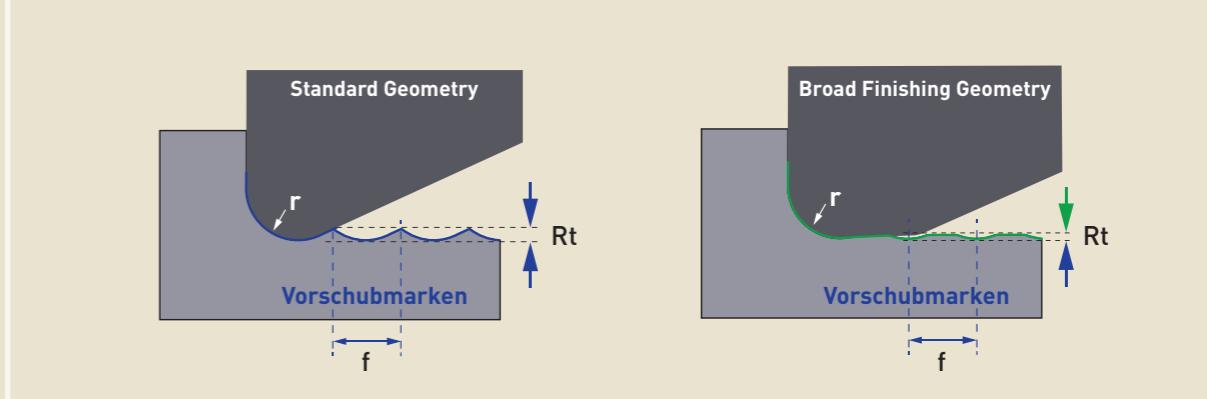

Advantages when using Wiper Geometries

By using the same feed rate a 2-4 times better surface quality can be obtained or with a 2-4 times higher feed rate the same surface quality can be reached.

To get the wiper Geometry into cutting condition please use the following lead angles at the machine:

C and W Type: 95°


D Type: 93°

CCGW ...
(Z1)




Page 16

DCGW ...
(Z1)



Page 27 to Face Turning
Page 28 to Side Turning

WCGW ...
(Z3)











Application examples

our Cutting in use

Not just theory - we would like to show you our tools in action. On this page you will find a selection of our Diamond application videos. Click on the QR code to get more information about the video.


Also visit our YouTube Channel at dts-gmbh!

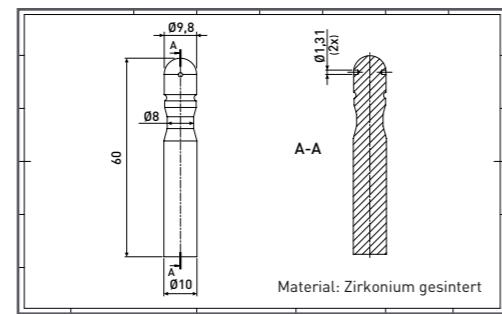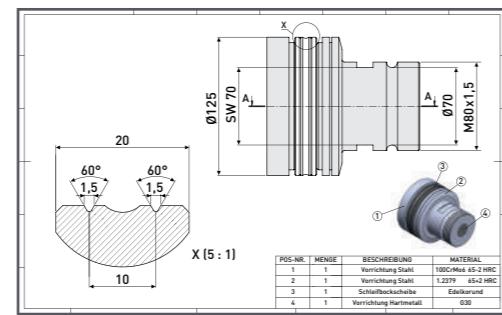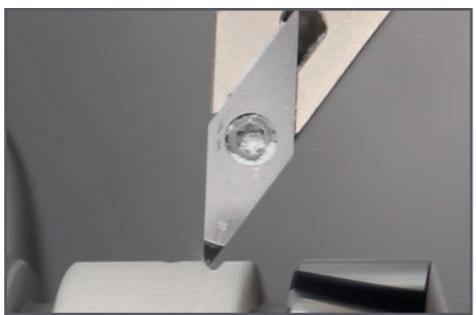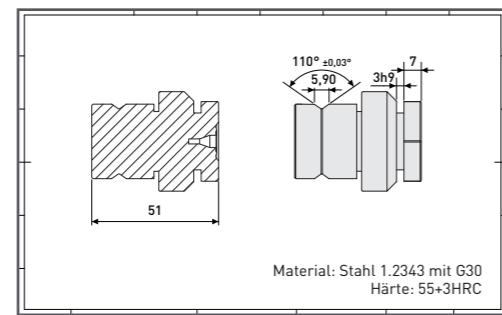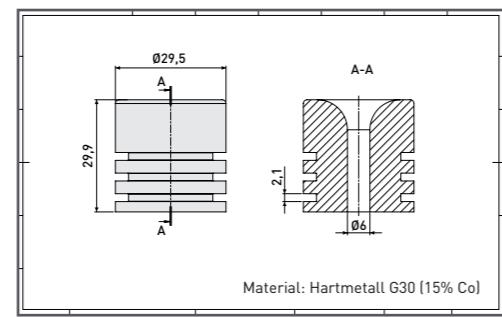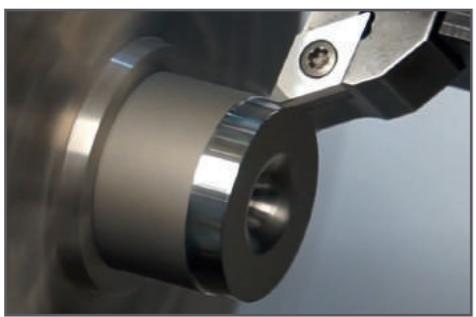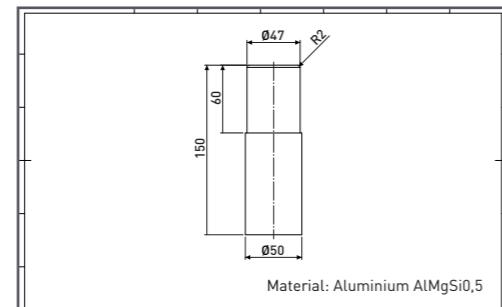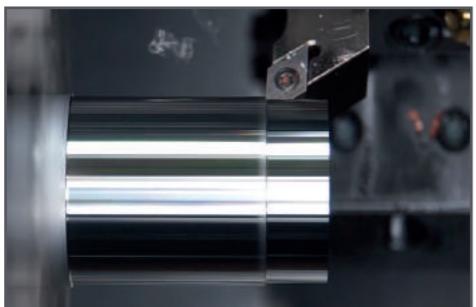


ISO Code

Diamond Cutting Inserts

Shape

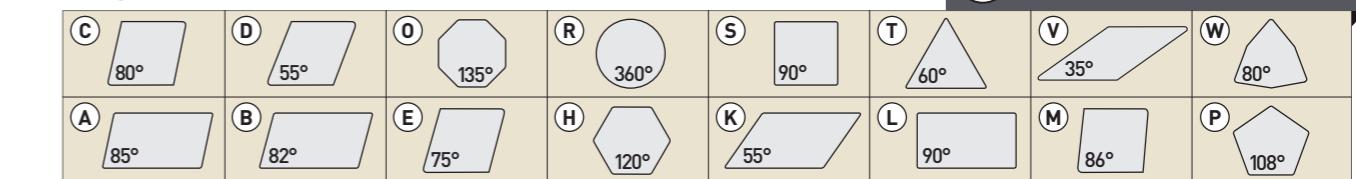

Clearance




Tolerance [mm]

	m	s	d		m	s	d	
(A)	$\pm 0,005$	$\pm 0,025$	$\pm 0,025$	(J)	$\pm 0,005$	$\pm 0,025$	$\pm 0,05 \rightarrow \pm 0,15$	
(F)	$\pm 0,005$	$\pm 0,025$	$\pm 0,013$	(K)	$\pm 0,013$	$\pm 0,025$	$\pm 0,05 \rightarrow \pm 0,15$	
(C)	$\pm 0,013$	$\pm 0,025$	$\pm 0,025$	(L)	$\pm 0,025$	$\pm 0,025$	$\pm 0,05 \rightarrow \pm 0,15$	
(H)	$\pm 0,013$	$\pm 0,025$	$\pm 0,013$	(M)	$\pm 0,08 \rightarrow \pm 0,20$	$\pm 0,130$	$\pm 0,05 \rightarrow \pm 0,15$	
(E)	$\pm 0,025$	$\pm 0,025$	$\pm 0,025$	(N)	$\pm 0,08 \rightarrow \pm 0,20$	$\pm 0,25$	$\pm 0,05 \rightarrow \pm 0,15$	
(G)	$\pm 0,025$	$\pm 0,130$	$\pm 0,025$	(U)	$\pm 0,13 \rightarrow \pm 0,38$	$\pm 0,130$	$\pm 0,08 \rightarrow \pm 0,15$	


*[M, N, U] The exact tolerance depends on the size of the insert.

Insert Type

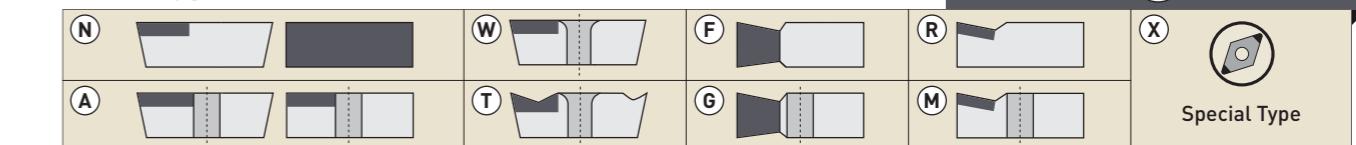

Special Type

Insert size [mm]

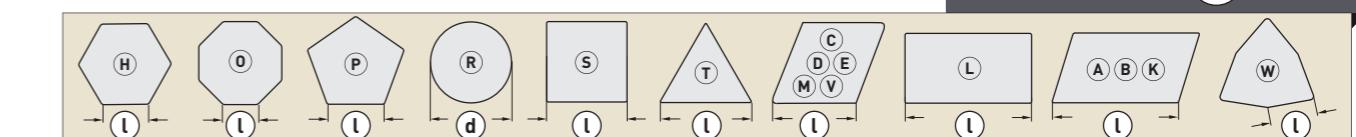

Insert size [mm]


01	S = 1,59	11	S = 1,98	02	S = 2,38	03	S = 3,18	13	S = 3,97	04	S = 4,76	05	S = 5,56	06	S = 6,35
By numbers below 10 a 0 is added in at the front. Decimals remain unconsidered (for example: 4,76 = 04)															

Corner configuration [mm]



CCGT - Positive Rake Angle

edge tipped



FN - Positive Rake Angle

Standard	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version	
								PKD Diamant	CVD-D Diamant
Standard	CCGT 060202	6,35	2,38	0,20	DP1010-0001	DP2010-0001		1-edge tipped	
	CCGT 060204	6,35	2,38	0,40	DP1010-0002	DP2010-0002		1-edge tipped	
	CCGT 060208	6,35	2,38	0,80	DP1010-0003	DP2010-0003		1-edge tipped	
	CCGT 09T302	9,525	3,97	0,20	DP1010-0004	DP2010-0004		1-edge tipped	
	CCGT 09T304	9,525	3,97	0,40	DP1010-0005	DP2010-0005		1-edge tipped	
	CCGT 09T308	9,525	3,97	0,80	DP1010-0006	DP2010-0006		1-edge tipped	
	CCGT 09T312	9,525	3,97	1,20	DP1010-0007	DP2010-0007		1-edge tipped	
	CCGT 120402	12,70	4,76	0,20	DP1010-0008	DP2010-0008		1-edge tipped	
	CCGT 120404	12,70	4,76	0,40	DP1010-0009	DP2010-0009		1-edge tipped	
	CCGT 120408	12,70	4,76	0,80	DP1010-0010	DP2010-0010		1-edge tipped	


Application range:

- PCD Aluminium <10% Si, Graphit grobkörnig, Brass, Brass bleifrei, Titanium (Schruppen) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.

CCGT - Chip Breaker

edge tipped



FN - Chip breaker for finishing (SPL-F) or roughing (SPL-R)

Standard	ISO Code	IC	S	R	Item No.	Item No.	Version	
							SPL-F (Finishing)	SPL-R (Roughing)
Standard	CCGT 060202	6,35	2,38	0,20	DP1011-0001		DP1011-0001	DP1012-0001
	CCGT 060204	6,35	2,38	0,40	DP1011-0002		DP1011-0002	DP1012-0002
	CCGT 060208	6,35	2,38	0,80	DP1011-0003		DP1011-0003	DP1012-0003
	CCGT 09T302	9,525	3,97	0,20	DP1011-0004		DP1012-0004	1-edge tipped
	CCGT 09T304	9,525	3,97	0,40	DP1011-0005		DP1012-0005	1-edge tipped
	CCGT 09T308	9,525	3,97	0,80	DP1011-0006		DP1012-0006	1-edge tipped
	CCGT 120402	12,70	4,76	0,20	DP1011-0458		DP1012-0458	1-edge tipped
	CCGT 120404	12,70	4,76	0,40	DP1011-0008		DP1012-0008	1-edge tipped
	CCGT 120408	12,70	4,76	0,80	DP1011-0009		DP1012-0009	1-edge tipped
	CCGT 060202 R/L-W	6,35	2,38	0,20	DP1011-0011		DP1012-0011	1-edge tipped
Wiper	CCGT 060204 R/L-W	6,35	2,38	0,40	DP1011-0012		DP1012-0012	1-edge tipped
	CCGT 09T302 R/L-W	9,525	3,97	0,20	DP1011-0014		DP1012-0014	1-edge tipped
	CCGT 09T304 R/L-W	9,525	3,97	0,40	DP1011-0015		DP1012-0015	1-edge tipped
	CCGT 09T308 R/L-W	9,525	3,97	0,80	DP1011-0016		DP1012-0016	1-edge tipped
	CCGT 120402 R/L-W	12,70	4,76	0,20	DP1011-0018		DP1012-0018	1-edge tipped
	CCGT 120404 R/L-W	12,70	4,76	0,40	DP1011-0019		DP1012-0019	1-edge tipped
	CCGT 120408 R/L-W	12,70	4,76	0,80	DP1011-0020		DP1012-0020	1-edge tipped

Also available in CVD and CBN with Chip breaker on request.



Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!

CCGT - Positive Rake Angle

entire edge



right version - Positive Rake Angle

Standard - right Version	ISO Code	ISO	I	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version
CCGT 060202 R-GS	6,35	2,38	0,20	DP1020-0055	DP2020-0055							entire edge
CCGT 060204 R-GS	6,35	2,38	0,40	DP1020-0001	DP2020-0001							entire edge
CCGT 060208 R-GS	6,35	2,38	0,80	DP1020-0002	DP2020-0002							entire edge
CCGT 09T304 R-GS	9,525	3,97	0,40	DP1020-0056	DP2020-0056							entire edge
CCGT 09T308 R-GS	9,525	3,97	0,80	DP1020-0003	DP2020-0003							entire edge
CCGT 09T312 R-GS	9,525	3,97	1,20	DP1020-0004	DP2020-0004							entire edge
CCGT 120404 R-GS	12,70	4,76	0,40	DP1020-0057	DP2020-0057							entire edge
CCGT 120408 R-GS	12,70	4,76	0,80	DP1020-0005	DP2020-0005							entire edge

Figure shows right version entire edge



left version - Positive Rake Angle

Standard - left Version	ISO Code	ISO	I	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version
CCGT 060202 L-GS	6,35	2,38	0,20	DP1020-0058	DP2020-0058							entire edge
CCGT 060204 L-GS	6,35	2,38	0,40	DP1020-0045	DP2020-0045							entire edge
CCGT 060208 L-GS	6,35	2,38	0,80	DP1020-0046	DP2020-0046							entire edge
CCGT 09T304 L-GS	9,525	3,97	0,40	DP1020-0059	DP2020-0059							entire edge
CCGT 09T308 L-GS	9,525	3,97	0,80	DP1020-0047	DP2020-0047							entire edge
CCGT 09T312 L-GS	9,525	3,97	1,20	DP1020-0048	DP2020-0048							entire edge
CCGT 120404 L-GS	12,70	4,76	0,40	DP1020-0060	DP2020-0060							entire edge
CCGT 120408 L-GS	12,70	4,76	0,80	DP1020-0049	DP2020-0049							entire edge

Figure shows left version entire edge

CCGT - Chip Breaker

entire edge



right version - Chip breaker for finishing (SPL-F) or roughing (SPL-R)

Standard - right Version	ISO Code	ISO	I	S	R	PKD Diamant	Item No.	PKD Diamant	Item No.	SPL-F (Finishing)	SPL-R (Roughing)	Version
CCGT 060202 R-GS	6,35	2,38	0,20	DP1021-0032	DP1022-0032							entire edge
CCGT 060204 R-GS	6,35	2,38	0,40	DP1021-0001	DP1022-0001							entire edge
CCGT 060208 R-GS	6,35	2,38	0,80	DP1021-0002	DP1022-0002							entire edge
CCGT 09T304 R-GS	9,525	3,97	0,40	DP1021-0033	DP1022-0033							entire edge
CCGT 09T308 R-GS	9,525	3,97	0,80	DP1021-0003	DP1022-0003							entire edge
CCGT 120404 R-GS	12,70	4,76	0,40	DP1021-0034	DP1022-0034							entire edge
CCGT 120408 R-GS	12,70	4,76	0,80	DP1021-0005	DP1022-0005							entire edge

Figure shows right version entire edge

Also available in CVD and CBN with Chip breaker on request.

left version - Chip breaker for finishing (SPL-F) or roughing (SPL-R)

Standard - left Version	ISO Code	ISO	I	S	R	PKD Diam	Item No.	PKD Diam	Item No.	SPL-F (Finishing)	SPL-R (Roughing)	Version
CCGT 060202 L-GS	6,35	2,38	0,20	DP1021-0035	DP1022-0035							entire edge
CCGT 060204 L-GS	6,35	2,38	0,40	DP1021-0031	DP1022-0031							entire edge
CCGT 060208 L-GS	6,35	2,38	0,80	DP1021-0027	DP1022-0027							entire edge
CCGT 09T304 L-GS	9,525	3,97	0,40	DP1021-0036	DP1022-0036							entire edge
CCGT 09T308 L-GS	9,525	3,97	0,80	DP1021-0028	DP1022-0028							entire edge
CCGT 09T312 L-GS	9,525	3,97	1,20	DP1021-0037	DP1022-0037							entire edge
CCGT 120404 L-GS	12,70	4,76	0,40	DP1021-0030	DP1022-0030							entire edge
CCGT 120408 L-GS	12,70	4,76	0,80									

Figure shows left version entire edge

Also available in CVD and CBN with Chip breaker on request.

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com


All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!

CCGW

edge tipped



FN - neutral

	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version		
								PKD Diamant	CVD-D Diamant	Ultra Diamant
Standard	CCGW 060201	6,35	2,38	0,10		DP2010-0591	DP1110-0591	1-edge tipped		
	CCGW 060202	6,35	2,38	0,20	DP1010-0021	DP2010-0021	DP1110-0021	1-edge tipped		
	CCGW 060204	6,35	2,38	0,40	DP1010-0022	DP2010-0022	DP1110-0022	1-edge tipped		
	CCGW 060208	6,35	2,38	0,80	DP1010-0023	DP2010-0023	DP1110-0023	1-edge tipped		
	CCGW 09T302	9,525	3,97	0,20	DP1010-0024	DP2010-0024		1-edge tipped		
	CCGW 09T304	9,525	3,97	0,40	DP1010-0025	DP2010-0025		1-edge tipped		
	CCGW 09T308	9,525	3,97	0,80	DP1010-0026	DP2010-0026		1-edge tipped		
	CCGW 09T312	9,525	3,97	1,20	DP1010-0027	DP2010-0027		1-edge tipped		
	CCGW 120402	12,70	4,76	0,20	DP1010-0700	DP2010-0129		1-edge tipped		
	CCGW 120404	12,70	4,76	0,40	DP1010-0028	DP2010-0028		1-edge tipped		
	CCGW 120408	12,70	4,76	0,80	DP1010-0029	DP2010-0029		1-edge tipped		
	CCGW 120412	12,70	4,76	1,20	DP1010-0030	DP2010-0030		1-edge tipped		
Wiper	CCGW 060202 R/L-W	6,35	2,38	0,20	DP1010-0031	DP2010-0031		1-edge tipped		
	CCGW 060204 R/L-W	6,35	2,38	0,40	DP1010-0032	DP2010-0032		1-edge tipped		
	CCGW 09T302 R/L-W	9,525	3,97	0,20	DP1010-0034	DP2010-0034		1-edge tipped		
	CCGW 09T304 R/L-W	9,525	3,97	0,40	DP1010-0035	DP2010-0035		1-edge tipped		
	CCGW 09T308 R/L-W	9,525	3,97	0,80	DP1010-0036	DP1010-0036		1-edge tipped		
	CCGW 120402 R/L-W	12,70	4,76	0,20	DP1010-0038	DP2010-0038		1-edge tipped		
	CCGW 120404 R/L-W	12,70	4,76	0,40	DP1010-0039	DP2010-0039		1-edge tipped		
	CCGW 120408 R/L-W	12,70	4,76	0,80	DP1010-0040	DP2010-0040		1-edge tipped		

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.

CCGW

entire edge | right and left version



right version - neutral

Standard - right Version	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version			
								PKD Diamant	CVD-D Diamant	Ultra Diamant	
	CCGW 060202 R-GS	6,35	2,38	0,20	DP1020-0061	DP2020-0061					entire edge
	CCGW 060204 R-GS	6,35	2,38	0,40	DP1020-0006	DP2020-0006					entire edge
	CCGW 060208 R-GS	6,35	2,38	0,80	DP1020-0007	DP2020-0007					entire edge
	CCGW 09T304 R-GS	9,525	3,97	0,40	DP1020-0062	DP2020-0062					entire edge
	CCGW 09T308 R-GS	9,525	3,97	0,80	DP1020-0008	DP2020-0008					entire edge
	CCGW 09T312 R-GS	9,525	3,97	1,20	DP1020-0009	DP2020-0009					entire edge
	CCGW 120404 R-GS	12,70	4,76	0,40	DP1020-0063	DP2020-0063					entire edge
	CCGW 120408 R-GS	12,70	4,76	0,80	DP1020-0010	DP2020-0010					entire edge

left version - neutral

Standard - Left Version	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version			
								PKD Diamant	CVD-D Diamant	Ultra Diamant	
	CCGW 060202 L-GS	6,35	2,38	0,20	DP1020-0064	DP2020-0064					entire edge
	CCGW 060204 L-GS	6,35	2,38	0,40	DP1020-0050	DP2020-0050					entire edge
	CCGW 060208 L-GS	6,35	2,38	0,80	DP1020-0051	DP2020-0051					entire edge
	CCGW 09T304 L-GS	9,525	3,97	0,40	DP1020-0065	DP2020-0065					entire edge
	CCGW 09T308 L-GS	9,525	3,97	0,80	DP1020-0052	DP2020-0052					entire edge
	CCGW 09T312 L-GS	9,525	3,97	1,20	DP1020-0053	DP2020-0053					entire edge
	CCGW 120404 L-GS	12,70	4,76	0,40	DP1020-0066	DP2020-0066					entire edge
	CCGW 120408 L-GS	12,70	4,76	0,80	DP1020-0054	DP2020-0054					entire edge



Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!

CDGW

FullFace | edge tipped



FullFace | right and left Version

MiniTools	Right	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version
		CDGW 03X101-R	3,20	0,63	0,10		DP2030-0500		FullFace (Z1)
Left	CDGW 03X102-R	3,20	0,63	0,20		DP2030-0502			FullFace (Z1)
	CDGW 03X101-L	3,20	0,63	0,10		DP2030-0501			FullFace (Z1)
	CDGW 03X102-L	3,20	0,63	0,20		DP2030-0503			FullFace (Z1)

! You will find the matching MiniTool holder in our boring bar catalog (03) on page 21.

CNGA

edge tipped



FN - neutral

Standard	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version	
	CNGA 120404	12,70	4,76	0,40		DP2010-0173			1-edge tipped
	CNGA 120408	12,70	4,76	0,80		DP2010-0174			1-edge tipped
	CNGA 120412	12,70	4,76	1,20		DP2010-0175			1-edge tipped

FN - neutral

MiniTools	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version	
	CDGW 040101	3,97	1,00	0,10		DP2010-0511	DP1110-1480		2-edge tipped
Left	CDGW 040102	3,97	1,00	0,20		DP2010-0512	DP1110-1482		2-edge tipped
	CDGW 040104	3,97	1,00	0,40		DP2010-0513	DP1110-1484		2-edge tipped

! You will find the matching MiniTool holder in our boring bar catalog (03) on page 22.

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.



Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!

CPGT - Positive Rake Angle

edge tipped



FN - Positive Rake Angle


Standard	ISO Code	IC	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version		
	CPGT 060202	6,35	2,38	0,20	DP1010-0201	DP2010-0201					1-edge tipped		
	CPGT 060204	6,35	2,38	0,40	DP1010-0202	DP2010-0202					1-edge tipped		
	CPGT 060208	6,35	2,38	0,80	DP1010-0203	DP2010-0203					1-edge tipped		

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

CPGT - Chip Breaker

edge tipped



FN - neutral - Chip breaker for finishing (SPL-F) or roughing (SPL-R)

Standard	ISO Code	IC	S	R	PKD Diamant	PKD Diamant	Item No.	Item No.	Version		
									SPL-F (Finishing)	SPL-R (Roughing)	
	CPGT 060202	6,35	2,38	0,20			DP1011-0251		DP1012-0251		1-edge tipped
	CPGT 060204	6,35	2,38	0,40			DP1011-0252		DP1012-0252		1-edge tipped
	CPGT 060208	6,35	2,38	0,80			DP1011-0253		DP1012-0253		1-edge tipped
	CPGT 09T302	9,525	3,97	0,20			DP1011-0254		DP1012-0254		1-edge tipped
	CPGT 09T304	9,525	3,97	0,40			DP1011-0255		DP1012-0255		1-edge tipped
	CPGT 09T308	9,525	3,97	0,80			DP1011-0256		DP1012-0256		1-edge tipped
	CPGT 120404	12,70	4,76	0,40			DP1011-0257		DP1012-0257		1-edge tipped
	CPGT 120408	12,70	4,76	0,80			DP1011-0258		DP1012-0258		1-edge tipped

Also available in CVD and CBN with Chip breaker on request.




Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!



FN - neutral

Standard	ISO Code	IC	S	R	SKL 3,00 mm 1-edge tipped			Version
					PKD Diamant	CVD-D Diamant	Ultra Diamant	
	CPGW 060201	6,35	2,38	0,10		DP2010-0595		1-edge tipped
	CPGW 060202	6,35	2,38	0,20	DP1010-0251	DP2010-0251		1-edge tipped
	CPGW 060204	6,35	2,38	0,40	DP1010-0252	DP2010-0252		1-edge tipped
	CPGW 060208	6,35	2,38	0,80	DP1010-0253	DP2010-0253		1-edge tipped
	CPGW 09T301	9,525	3,97	0,10		DP2010-0596		1-edge tipped
	CPGW 09T302	9,525	3,97	0,20	DP1010-0254	DP2010-0254		1-edge tipped
	CPGW 09T304	9,525	3,97	0,40	DP1010-0255	DP2010-0255		1-edge tipped
	CPGW 09T308	9,525	3,97	0,80	DP1010-0256	DP2010-0256		1-edge tipped
	CPGW 120404	12,70	4,76	0,40	DP1010-0257	DP2010-0257		1-edge tipped
	CPGW 120408	12,70	4,76	0,80	DP1010-0258	DP2010-0258		1-edge tipped
	CPGW 120412	12,70	4,76	1,20	DP1010-0259	DP2010-0259		1-edge tipped

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

Your Notes

DCGT - Positive Rake Angle

edge tipped



FN - Positive Rake Angle

Standard	ISO Code	IC	S	R	SKL 3,00 mm 1-edge tipped			Version
					PKD Diamant	CVD-D Diamant	Ultra Diamant	
	DCGT 070201	6,35	2,38	0,10	DP1010-0601	DP2010-0601		1-edge tipped
	DCGT 070202	6,35	2,38	0,20	DP1010-0042	DP2010-0042		1-edge tipped
	DCGT 070204	6,35	2,38	0,40	DP1010-0043	DP2010-0043		1-edge tipped
	DCGT 070208	6,35	2,38	0,80	DP1010-0044	DP2010-0044		1-edge tipped
	DCGT 11T301	9,525	3,97	0,10	DP1010-0602	DP2010-0602		1-edge tipped
	DCGT 11T302	9,525	3,97	0,20	DP1010-0045	DP2010-0045		1-edge tipped
	DCGT 11T304	9,525	3,97	0,40	DP1010-0046	DP2010-0046		1-edge tipped
	DCGT 11T308	9,525	3,97	0,80	DP1010-0047	DP2010-0047		1-edge tipped
	DCGT 11T312	9,525	3,97	1,20	DP1010-0048	DP2010-0048		1-edge tipped

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.

DCGT - Chip Breaker

edge tipped



FN - neutral - Chip breaker for finishing (SPL-F) or roughing (SPL-R)

Standard	ISO Code	IC	S	R	SKL 3,00 mm 1-edge tipped		Version	
					PKD Diamant	PKD Diamant		
	DCGT 070202	6,35	2,38	0,20	DP1011-0022		DP1012-0022	1-edge tipped
	DCGT 070204	6,35	2,38	0,40	DP1011-0023		DP1012-0023	1-edge tipped
	DCGT 070208	6,35	2,38	0,80	DP1011-0024		DP1012-0024	1-edge tipped
	DCGT 11T302	9,525	3,97	0,20	DP1011-0025		DP1012-0025	1-edge tipped
	DCGT 11T304	9,525	3,97	0,40	DP1011-0026		DP1012-0026	1-edge tipped
	DCGT 11T308	9,525	3,97	0,80	DP1011-0027		DP1012-0027	1-edge tipped

Also available in CVD and CBN with Chip breaker on request.

Subject to technical changes.



Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!

DCGW

edge tipped



FN - neutral



MinITools	ISO Code	IC	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Version
					Item No.	Item No.	Item No.	
DCGW 04T001	3,10	1,20	0,10		DP2010-0521	DP1110-1492		2-edge tipped
DCGW 04T002	3,10	1,20	0,20		DP2010-0522	DP1110-1494		2-edge tipped
DCGW 04T004	3,10	1,20	0,40		DP2010-0523	DP1110-1496		2-edge tipped


! You will find the matching MiniTool holder in our boring bar catalog (03) on page 24.

DCGW

edge tipped




R/L - Wiper for face turning

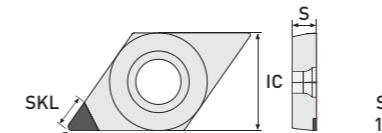

Standard	ISO Code	IC	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Version
					Item No.	Item No.	Item No.	
DCGW 070201	6,35	2,38	0,10		DP1010-0603	DP2010-0603	DP1110-0603	1-edge tipped
DCGW 070202	6,35	2,38	0,20		DP1010-0056	DP2010-0056	DP1110-0056	1-edge tipped
DCGW 070204	6,35	2,38	0,40		DP1010-0057	DP2010-0057	DP1110-0057	1-edge tipped
DCGW 070208	6,35	2,38	0,80		DP1010-0058	DP2010-0058	DP1110-0058	1-edge tipped
DCGW 11T301	9,525	3,97	0,10		DP1010-0604	DP2010-0604	DP1110-0604	1-edge tipped
DCGW 11T302	9,525	3,97	0,20		DP1010-0059	DP2010-0059	DP1110-0059	1-edge tipped
DCGW 11T304	9,525	3,97	0,40		DP1010-0060	DP2010-0060	DP1110-0060	1-edge tipped
DCGW 11T308	9,525	3,97	0,80		DP1010-0061	DP2010-0061	DP1110-0061	1-edge tipped
DCGW 11T312	9,525	3,97	1,20		DP1010-0062	DP2010-0062	DP1110-0062	1-edge tipped
DCGW 11T320	9,525	3,97	2,00				DP1110-0133	1-edge tipped

Wiper - to face	DCGW 070202 R/L W	6,35	2,38	0,20	DP1010-0063	DP2010-0063		1-edge tipped
					Item No.	Item No.	Version	
DCGW 070204 R/L W	6,35	2,38	0,40		DP1010-0064	DP2010-0064		1-edge tipped
DCGW 070208 R/L W	6,35	2,38	0,80		DP1010-0128	DP2010-0130		1-edge tipped
DCGW 11T302 R/L W	9,525	3,97	0,20		DP1010-0065	DP2010-0065		1-edge tipped
DCGW 11T304 R/L W	9,525	3,97	0,40		DP1010-0066	DP2010-0066		1-edge tipped
DCGW 11T308 R/L W	9,525	3,97	0,80		DP1010-0129	DP2010-0131		1-edge tipped

Picture shows face turning

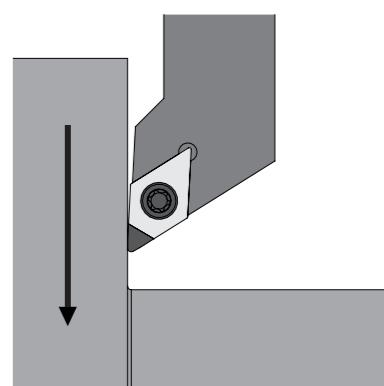

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.




Scan me!


DCGW - Wiper - FR/FL

zum Side Turning

FR (Right) and FL (Left) - Wiper - Side Turning

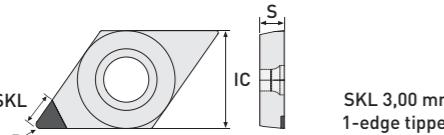Wiper - Side Turning	 SKL 3,00 mm 1-edge tipped				PKD Diamant		Item No.
	ISO Code	IC	S	R	Wiper	Version	
Wiper - Längsdrehens	DCGW 070202 FR-W	6,35	2,38	0,20	DP1019-0102	1-edge tipped	
	DCGW 070202 FL-W	6,35	2,38	0,20	DP1019-0103	1-edge tipped	
	DCGW 070204 FR-W	6,35	2,38	0,40	DP1019-0104	1-edge tipped	
	DCGW 070204 FL-W	6,35	2,38	0,40	DP1019-0105	1-edge tipped	
	DCGW 070208 FR-W	6,35	2,38	0,80	DP1019-0106	1-edge tipped	
	DCGW 070208 FL-W	6,35	2,38	0,80	DP1019-0107	1-edge tipped	
	DCGW 11T302 FR-W	9,525	3,97	0,20	DP1019-0112	1-edge tipped	
	DCGW 11T302 FL-W	9,525	3,97	0,20	DP1019-0113	1-edge tipped	
	DCGW 11T304 FR-W	9,525	3,97	0,40	DP1019-0114	1-edge tipped	
	DCGW 11T304 FL-W	9,525	3,97	0,40	DP1019-0115	1-edge tipped	
	DCGW 11T308 FR-W	9,525	3,97	0,80	DP1019-0116	1-edge tipped	
	DCGW 11T308 FL-W	9,525	3,97	0,80	DP1019-0117	1-edge tipped	

Picture shows Side Turning

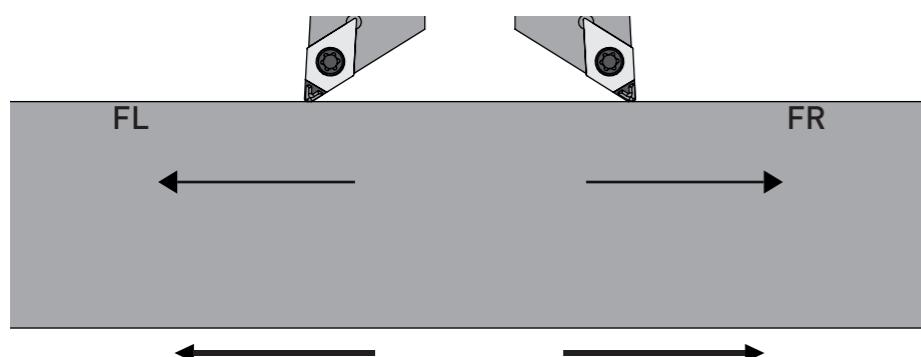

Application range:


- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.

DCGT - Wiper with Chip Breaker - FR/FL


zum Side Turning

FR (Right) and FL (Left) - Wiper - Side Turning

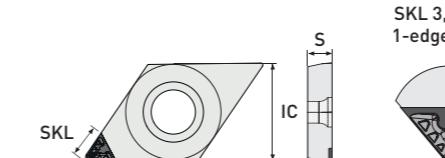Wiper - Längsdrehens	 SKL 3,00 mm 1-edge tipped				PKD Diamant		Item No.
	ISO Code	IC	S	R	SPL-F (Finishing)	SPL-R (Roughing)	
Wiper - Längsdrehens	DCGT 070202 FR-W	6,35	2,38	0,20	DP1019-0122	DP1019-0142	1-edge tipped
	DCGT 070202 FL-W	6,35	2,38	0,20	DP1019-0123	DP1019-0143	1-edge tipped
	DCGT 070204 FR-W	6,35	2,38	0,40	DP1019-0124	DP1019-0144	1-edge tipped
	DCGT 070204 FL-W	6,35	2,38	0,40	DP1019-0125	DP1019-0145	1-edge tipped
	DCGT 070208 FR-W	6,35	2,38	0,80	DP1019-0126	DP1019-0146	1-edge tipped
	DCGT 070208 FL-W	6,35	2,38	0,80	DP1019-0127	DP1019-0147	1-edge tipped
	DCGT 11T302 FR-W	9,525	3,97	0,20	DP1019-0132	DP1019-0152	1-edge tipped
	DCGT 11T302 FL-W	9,525	3,97	0,20	DP1019-0133	DP1019-0153	1-edge tipped
	DCGT 11T304 FR-W	9,525	3,97	0,40	DP1019-0134	DP1019-0154	1-edge tipped
	DCGT 11T304 FL-W	9,525	3,97	0,40	DP1019-0135	DP1019-0155	1-edge tipped
	DCGT 11T308 FR-W	9,525	3,97	0,80	DP1019-0136	DP1019-0156	1-edge tipped
	DCGT 11T308 FL-W	9,525	3,97	0,80	DP1019-0137	DP1019-0157	1-edge tipped

Also available in CVD and CBN with Chip breaker on request.

Picture shows Side Turning

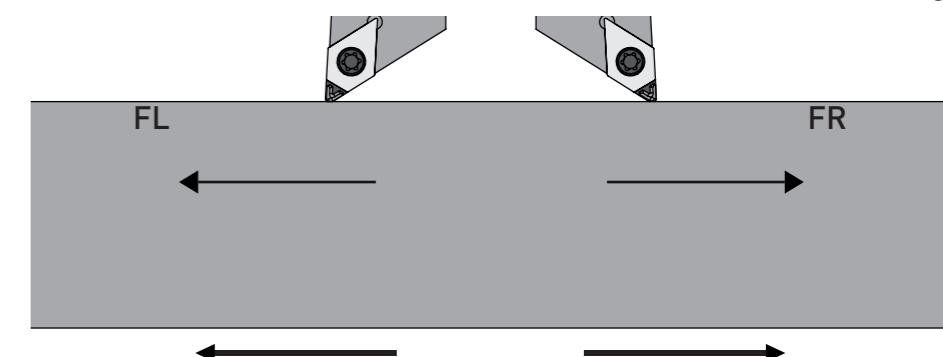

Special tools on request for you!
Please send inquiries to info@Diamond-toolsystems.com

All our products are also available in the online shop.
Visit us at Diamond-tools24.com




Scan me!



DNGA

edge tipped

FN - neutral

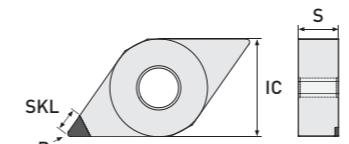

SKL 3,00 mm
1-edge tipped

	ISO Code	IC	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version
Standard	DNGA 150602	12,70	6,35	0,20				DP2010-0282			1-edge tipped
	DNGA 150604	12,70	6,35	0,40				DP2010-0283			1-edge tipped
	DNGA 150608	12,70	6,35	0,80				DP2010-0284			1-edge tipped



Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com




All our products are also available in the online shop.
Visit us at Diamond-tools24.com




Scan me!

DXGW

edge tipped



FN - neutral

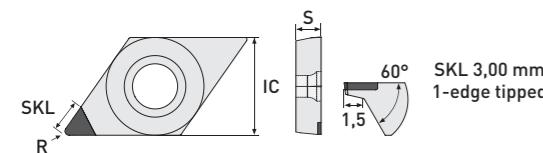


DTS - Specials	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version
	PKD Diamant	CVD-D Diamant	Ultra Diamant					
DXGW 11T301	9,525	3,97	0,10		DP2010-0300			1-edge tipped
DXGW 11T302	9,525	3,97	0,20		DP2010-0301			1-edge tipped
DXGW 11T304	9,525	3,97	0,40		DP2010-0302			1-edge tipped
DXGW 11T308	9,525	3,97	0,80		DP2010-0303			1-edge tipped

! The matching holders on request, available from stock.

DTS-Specials

Face / Axial Machining:


Our DXGW cutting insert is designed for face and axial machining of contours from a minimum outside diameter of 10mm, using the maximum groove depth of 1.5mm.

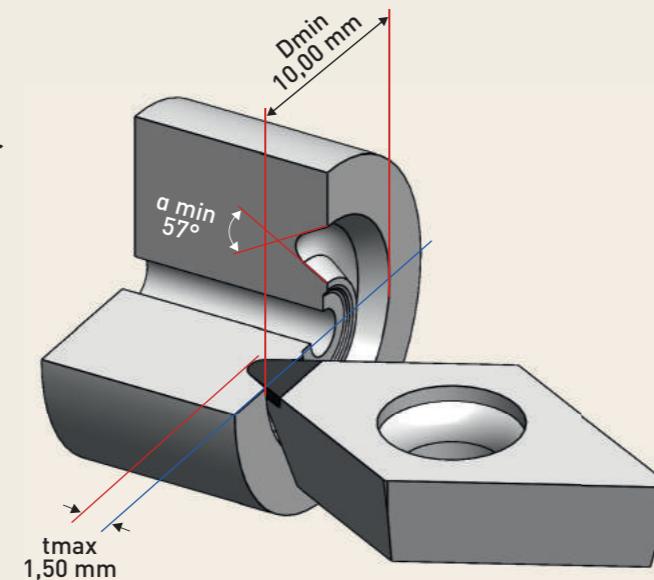


It is tipped with CVD-D as standard, but is of course also available with PCD or Ultra-Diamond on request.

EPGW

edge tipped



FN - neutral

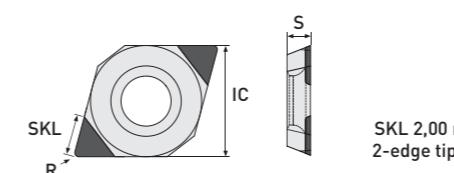

MiniTools	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version
	PKD Diamant	CVD-D Diamant	Ultra Diamant					
EPGW 050201	5,56	2,38	0,10		DP2010-0531	DP1110-1400		2-edge tipped
EPGW 050202	5,56	2,38	0,20		DP2010-0532	DP1110-1402		2-edge tipped
EPGW 050204	5,56	2,38	0,40		DP2010-0533	DP1110-1404		2-edge tipped

! You will find the matching MiniTool holder in our boring bar catalog [03] on page 26.

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.




Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!



FN - FullFace

	ISO Code	IC	S	R	FullFace			Version
					Item No.	PKD Diamant	CVD-D Diamant	
Standard	RBGN 0602M0 FF	6,00	2,38	-	DP1030-0090	DP2030-0090		FullFace
	RBGN 0803M0 FF	8,00	3,18	-	DP1030-0092	DP2030-0092		FullFace
	RBGN 1003M0 FF	10,00	3,18	-	DP1030-0094	DP2030-0094		FullFace
	RBGN 1203M0 FF	12,00	3,18	-	DP1030-0096	DP2030-0096		FullFace

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.



FN - FullFace

	ISO Code	IC	S	R	FullFace			Version
					Item No.	PKD Diamant	CVD-D Diamant	
Standard	RCGW 0602M0 FF	6,00	2,38	-	DP1030-0001	DP2030-0001		FullFace
	RCGW 0803M0 FF	8,00	3,18	-	DP1030-0002	DP2030-0002		FullFace
	RCGW 1003M0 FF	10,00	3,18	-	DP1030-0003	DP2030-0003		FullFace
	RCGW 10T3M0 FF	10,00	3,97	-	DP1030-0004	DP2030-0004		FullFace
	RCGW 1204M0 FF	12,00	4,76	-	DP1030-0005	DP2030-0005		FullFace

! The matching MiniTool holders for plate size 06 can be found in our precision boring tools catalogue (03) on page 27.



Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com




All our products are also available in the online shop.
Visit us at Diamond-tools24.com




Scan me!

SCGT - Positive Rake Angle

edge tipped



FN - Positive Rake Angle

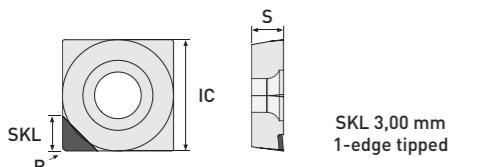


SKL 3,00 mm
1-edge tipped


Standard	ISO Code	IC	S	R	Item No.			Version
					PKD Diamant	CVD-D Diamant	Ultra Diamant	
	SCGT 09T302	9,525	3,97	0,20	DP1010-0067	DP2010-0067		1-edge tipped
	SCGT 09T304	9,525	3,97	0,40	DP1010-0068	DP2010-0068		1-edge tipped
	SCGT 09T308	9,525	3,97	0,80	DP1010-0069	DP2010-0069		1-edge tipped
	SCGT 09T312	9,525	3,97	1,20	DP1010-0070	DP2010-0070		1-edge tipped
	SCGT 120404	12,70	4,76	0,40	DP1010-0130	DP2010-0132		1-edge tipped
	SCGT 120408	12,70	4,76	0,80	DP1010-0071	DP2010-0071		1-edge tipped
	SCGT 120412	12,70	4,76	1,20	DP1010-0072	DP2010-0072		1-edge tipped

SCGW

edge tipped



FN - neutral

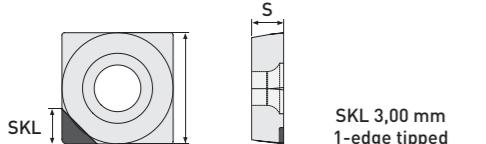

SKL 3,00 mm
1-edge tipped

Standard	ISO Code	IC	S	R	Item No.			Version
					PKD Diamant	CVD-D Diamant	Ultra Diamant	
	SCGW 09T302	9,525	3,97	0,20	DP1010-0073	DP2010-0073		1-edge tipped
	SCGW 09T304	9,525	3,97	0,40	DP1010-0074	DP2010-0074		1-edge tipped
	SCGW 09T308	9,525	3,97	0,80	DP1010-0075	DP2010-0075		1-edge tipped
	SCGW 09T312	9,525	3,97	1,20	DP1010-0076	DP2010-0076		1-edge tipped
	SCGW 120404	12,70	4,76	0,40	DP1010-0077	DP2010-0077		1-edge tipped
	SCGW 120408	12,70	4,76	0,80	DP1010-0078	DP2010-0078		1-edge tipped
	SCGW 120412	12,70	4,76	1,20	DP1010-0079	DP2010-0079		1-edge tipped

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...


You will find further application ranges in the detailed overview on page 7.

SCGT - Positive Rake Angle

entire edge



FN - Positive Rake Angle



entire edge


Standard	ISO Code	IC	S	R	Item No.			Version
					PKD Diamant	CVD-D Diamant	Ultra Diamant	
	SCGT 09T304 GS	9,525	3,97	0,40	DP1020-0067	DP2020-0067		entire edge
	SCGT 09T308 GS	9,525	3,97	0,80	DP1020-0011	DP2020-0011		entire edge
	SCGT 09T312 GS	9,525	3,97	1,20	DP1020-0012	DP2020-0012		entire edge
	SCGT 120404 GS	12,70	4,76	0,40	DP1020-0068	DP2020-0068		entire edge
	SCGT 120408 GS	12,70	4,76	0,80	DP1020-0013	DP2020-0013		entire edge
	SCGT 120412 GS	12,70	4,76	1,20	DP1020-0014	DP2020-0014		entire edge

SCGW

entire edge



FN - neutral



entire edge

Standard	ISO Code	IC	S	R	Item No.			Version
					PKD Diamant	CVD-D Diamant	Ultra Diamant	
	SCGW 09T304 GS	9,525	3,97	0,40	DP1020-0015	DP2020-0015		entire edge
	SCGW 09T308 GS	9,525	3,97	0,80	DP1020-0016	DP2020-0016		entire edge
	SCGW 09T312 GS	9,525	3,97	1,20	DP1020-0017	DP2020-0017		entire edge
	SCGW 120404 GS	12,70	4,76	0,40	DP1020-0018	DP2020-0018		entire edge
	SCGW 120408 GS	12,70	4,76	0,80	DP1020-0019	DP2020-0019		entire edge
	SCGW 120412 GS	12,70	4,76	1,20	DP1020-0020	DP2020-0020		entire edge

Special tools on request for you!
Please send inquiries to info@Diamond-toolsystems.com

All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!

TCGT - Positive Rake Angle

edge tipped



FN - Positive Rake Angle

Standard	ISO Code	IC	S	R	SKL 3,00 mm 1-edge tipped	PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version
						PKD	CVD-D	Ultra				
	TCGT 090202	5,56	2,38	0,20	DP1010-0080	DP2010-0080						1-edge tipped
	TCGT 090204	5,56	2,38	0,40	DP1010-0081	DP2010-0081						1-edge tipped
	TCGT 090208	5,56	2,38	0,80	DP1010-0082	DP2010-0082						1-edge tipped
	TCGT 110202	6,35	2,38	0,20	DP1010-0083	DP2010-0083						1-edge tipped
	TCGT 110204	6,35	2,38	0,40	DP1010-0084	DP2010-0084						1-edge tipped
	TCGT 110208	6,35	2,38	0,80	DP1010-0085	DP2010-0085						1-edge tipped
	TCGT 16T302	9,525	3,97	0,20	DP1010-0086	DP2010-0086						1-edge tipped
	TCGT 16T304	9,525	3,97	0,40	DP1010-0087	DP2010-0087						1-edge tipped
	TCGT 16T308	9,525	3,97	0,80	DP1010-0088	DP2010-0088						1-edge tipped
	TCGT 16T312	9,525	3,97	1,20	DP1010-0089	DP2010-0089						1-edge tipped


Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.

TCGT - Chip Breaker

edge tipped



FN - neutral - Chip breaker for finishing (SPL-F) or roughing (SPL-R)

Standard	ISO Code	IC	S	R	SKL 3,00 mm 1-edge tipped	PKD Diamant	PKD Diamant	Item No.	Item No.	SPL-F (Finishing)	SPL-R (Roughing)	Version
						PKD	PKD					
	TCGT 090202	5,56	2,38	0,20	DP1011-0040			DP1012-0040		1-edge tipped		
	TCGT 090204	5,56	2,38	0,40	DP1011-0041			DP1012-0041		1-edge tipped		
	TCGT 090208	5,56	2,38	0,80	DP1011-0042			DP1012-0042		1-edge tipped		
	TCGT 110202	6,35	2,38	0,20	DP1011-0043			DP1012-0043		1-edge tipped		
	TCGT 110204	6,35	2,38	0,40	DP1011-0044			DP1012-0044		1-edge tipped		
	TCGT 110208	6,35	2,38	0,80	DP1011-0045			DP1012-0045		1-edge tipped		
	TCGT 16T302	9,525	3,97	0,20	DP1011-0046			DP1012-0046		1-edge tipped		
	TCGT 16T304	9,525	3,97	0,40	DP1011-0047			DP1012-0047		1-edge tipped		
	TCGT 16T308	9,525	3,97	0,80	DP1011-0048			DP1012-0048		1-edge tipped		

Also available in CVD and CBN with Chip breaker on request.



Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com




All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!

TCGT - Positive Rake Angle

entire edge



FN - Positive Rake Angle

Standard	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version
					PKD Diamant	CVD-D Diamant	Ultra Diamant	
Standard	TCGT 090202 GS	5,56	2,38	0,20	DP1020-0069	DP2020-0069		entire edge
	TCGT 090204 GS	5,56	2,38	0,40	DP1020-0021	DP2020-0021		entire edge
	TCGT 090208 GS	5,56	2,38	0,80	DP1020-0022	DP2020-0022		entire edge
	TCGT 110202 GS	6,35	2,38	0,20	DP1020-0070	DP2020-0070		entire edge
	TCGT 110204 GS	6,35	2,38	0,40	DP1020-0023	DP2020-0023		entire edge
	TCGT 110208 GS	6,35	2,38	0,80	DP1020-0024	DP2020-0024		entire edge
	TCGT 110212 GS	6,35	2,38	1,20	DP1020-0025	DP2020-0025		entire edge
	TCGT 16T302 GS	9,525	3,97	0,20	DP1020-0071	DP2020-0071		entire edge
	TCGT 16T304 GS	9,525	3,97	0,40	DP1020-0027	DP2020-0027		entire edge
	TCGT 16T308 GS	9,525	3,97	0,80	DP1020-0028	DP2020-0028		entire edge
	TCGT 16T312 GS	9,525	3,97	1,20	DP1020-0029	DP2020-0029		entire edge


Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.

TCGT - Chip Breaker

entire edge



FN - neutral - Chip breaker for finishing (SPL-F) or roughing (SPL-R)

Standard	ISO Code	IC	S	R	Item No.	Item No.	Version
Standard	TCGT 090202 GS	5,56	2,38	0,20	DP1021-0038	DP1022-0038	entire edge
	TCGT 090204 GS	5,56	2,38	0,40	DP1021-0012	DP1022-0012	entire edge
	TCGT 090208 GS	5,56	2,38	0,80	DP1021-0013	DP1022-0013	entire edge
	TCGT 110202 GS	6,35	2,38	0,20	DP1021-0039	DP1022-0039	entire edge
	TCGT 110204 GS	6,35	2,38	0,40	DP1021-0014	DP1022-0014	entire edge
	TCGT 110208 GS	6,35	2,38	0,80	DP1021-0015	DP1022-0015	entire edge
	TCGT 16T302 GS	9,525	3,97	0,20	DP1021-0040	DP1022-0040	entire edge
	TCGT 16T304 GS	9,525	3,97	0,40	DP1021-0018	DP1022-0018	entire edge
	TCGT 16T308 GS	9,525	3,97	0,80	DP1021-0019	DP1022-0019	entire edge
					Also available in CVD and CBN with Chip breaker on request.		

Subject to technical changes.



Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!

TCGW

edge tipped | FullFace



FN - neutral

Standard	ISO Code	IC	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version		
											1-edge tipped	entire edge	
	TCGW 090201	5,56	2,38	0,10	DP1010-0613	DP2010-0613					1-edge tipped		
	TCGW 090202	5,56	2,38	0,20	DP1010-0090	DP2010-0090					1-edge tipped		
	TCGW 090204	5,56	2,38	0,40	DP1010-0091	DP2010-0091					1-edge tipped		
	TCGW 090208	5,56	2,38	0,80	DP1010-0092	DP2010-0092					1-edge tipped		
	TCGW 110201	6,35	2,38	0,10	DP1010-0614	DP2010-0614					1-edge tipped		
	TCGW 110202	6,35	2,38	0,20	DP1010-0093	DP2010-0093					1-edge tipped		
	TCGW 110204	6,35	2,38	0,40	DP1010-0094	DP2010-0094					1-edge tipped		
	TCGW 110208	6,35	2,38	0,80	DP1010-0095	DP2010-0095					1-edge tipped		
	TCGW 16T302	9,525	3,97	0,20	DP1010-0096	DP2010-0096					1-edge tipped		
	TCGW 16T304	9,525	3,97	0,40	DP1010-0097	DP2010-0097					1-edge tipped		
	TCGW 16T308	9,525	3,97	0,80	DP1010-0098	DP2010-0098					1-edge tipped		
	TCGW 16T312	9,525	3,97	1,20	DP1010-0099	DP2010-0099					1-edge tipped		

FN - FullFace

Standard	ISO Code	IC	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version		
											FullFace	entire edge	
	TCGW 090202 FF	5,56	2,38	0,20	DP1030-0030	DP2030-0030					FullFace		
	TCGW 090204 FF	5,56	2,38	0,40	DP1030-0031	DP2030-0031					FullFace		
	TCGW 090208 FF	5,56	2,38	0,80	DP1030-0032	DP2030-0032					FullFace		
	TCGW 110202 FF	6,35	2,38	0,20	DP1030-0010	DP2030-0010					FullFace		
	TCGW 110204 FF	6,35	2,38	0,40	DP1030-0011	DP2030-0011					FullFace		
	TCGW 110208 FF	6,35	2,38	0,80	DP1030-0012	DP2030-0012					FullFace		

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.

TCGW

entire edge



FN - neutral

Standard	ISO Code	IC	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version		
											1-edge tipped	entire edge	
	TCGW 090202 GS	5,56	2,38	0,20	DP1020-0072	DP2020-0072					entire edge		
	TCGW 090204 GS	5,56	2,38	0,40	DP1020-0030	DP2020-0030					entire edge		
	TCGW 090208 GS	5,56	2,38	0,80	DP1020-0031	DP2020-0031					entire edge		
	TCGW 110202 GS	6,35	2,38	0,20	DP1020-0073	DP2020-0073					entire edge		
	TCGW 110204 GS	6,35	2,38	0,40	DP1020-0032	DP2020-0032					entire edge		
	TCGW 110208 GS	6,35	2,38	0,80	DP1020-0033	DP2020-0033					entire edge		
	TCGW 110212 GS	6,35	2,38	1,20	DP1020-0034	DP2020-0034					entire edge		
	TCGW 16T302 GS	9,525	3,97	0,20	DP1020-0074	DP2020-0074					entire edge		
	TCGW 16T304 GS	9,525	3,97	0,40	DP1020-0036	DP2020-0036					entire edge		
	TCGW 16T308 GS	9,525	3,97	0,80	DP1020-0037	DP2020-0037					entire edge		
	TCGW 16T312 GS	9,525	3,97	1,20	DP1020-0038	DP2020-0038					entire edge		

Subject to technical changes.



Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!

TPGN

edge tipped



FN - neutral

Standard	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version		
								PKD Diamant	CVD-D Diamant	Ultra Diamant
	TPGN 090204	5,56	2,38	0,40	DP1010-0100	DP2010-0100		1-edge tipped		
	TPGN 090208	5,56	2,38	0,80	DP1010-0101	DP2010-0101		1-edge tipped		
	TPGN 110204	6,35	2,38	0,40	DP1010-0102	DP2010-0102		1-edge tipped		
	TPGN 110208	6,35	2,38	0,80	DP1010-0103	DP2010-0103		1-edge tipped		
	TPGN 110302	6,35	3,18	0,20	DP1010-0104	DP2010-0104		1-edge tipped		
	TPGN 110304	6,35	3,18	0,40	DP1010-0105	DP2010-0105		1-edge tipped		
	TPGN 110308	6,35	3,18	0,80	DP1010-0106	DP2010-0106		1-edge tipped		
	TPGN 160304	9,525	3,18	0,40	DP1010-0107	DP2010-0107		1-edge tipped		
	TPGN 160308	9,525	3,18	0,80	DP1010-0108	DP2010-0108		1-edge tipped		
	TPGN 160312	9,525	3,18	1,20	DP1010-0109	DP2010-0109		1-edge tipped		

TPGN

entire edge




FN - neutral

Standard	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version		
								PKD Diamant	CVD-D Diamant	Ultra Diamant
	TPGN 110304 GS	6,35	3,18	0,40	DP1020-0039	DP2020-0039				entire edge
	TPGN 110308 GS	6,35	3,18	0,80	DP1020-0040	DP2020-0040				entire edge
	TPGN 110312 GS	6,35	3,18	1,20	DP1010-0041	DP2010-0041				entire edge
	TPGN 160304 GS	9,525	3,18	0,40	DP1020-0042	DP2020-0042				entire edge
	TPGN 160308 GS	9,525	3,18	0,80	DP1020-0043	DP2020-0043				entire edge
	TPGN 160312 GS	9,525	3,18	1,20	DP1020-0044	DP2020-0044				entire edge

TPGW

edge tipped



FN - neutral

MiniTools	ISO Code	IC	S	R	Item No.	Item No.	Item No.	Version		
								PKD Diamant	CVD-D Diamant	Ultra Diamant
	TPGW 06T101	3,97	1,98	0,10			DP2010-0671	DP1110-1410		1-edge tipped
	TPGW 06T102	3,97	1,98	0,20			DP2010-0672	DP1110-1412		1-edge tipped
	TPGW 06T104	3,97	1,98	0,40			DP2010-0673	DP1110-1414		1-edge tipped

! You will find the matching MiniTool holder in our boring bar catalog [03] on page 28.

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.

 Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com

 All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!

VBGT - Positive Rake Angle

edge tipped



FN - Positive Rake Angle

Standard	ISO Code	SKL 3,00 mm 1-edge tipped			PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version
		IC	S	R							
	VBGT 110201	6,35	2,38	0,10	DP1010-0605	DP2010-0605					1-edge tipped
	VBGT 110202	6,35	2,38	0,20	DP1010-0401	DP2010-0401					1-edge tipped
	VBGT 110204	6,35	2,38	0,40	DP1010-0402	DP2010-0402					1-edge tipped
	VBGT 110208	6,35	2,38	0,80	DP1010-0403	DP2010-0403					1-edge tipped
	VBGT 160401	9,525	4,76	0,10	DP1010-0606	DP2010-0606					1-edge tipped
	VBGT 160402	9,525	4,76	0,20	DP1010-0404	DP2010-0404					1-edge tipped
	VBGT 160404	9,525	4,76	0,40	DP1010-0405	DP2010-0405					1-edge tipped
	VBGT 160408	9,525	4,76	0,80	DP1010-0406	DP2010-0406					1-edge tipped
	VBGT 160412	9,525	4,76	1,20	DP1010-0407	DP2010-0407					1-edge tipped

VBGW

edge tipped



FN - neutral

Standard	ISO Code	SKL 3,00 mm 1-edge tipped			PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version
		IC	S	R							
	VBGW 110201	6,35	2,38	0,10	DP1010-0607	DP2010-0607					1-edge tipped
	VBGW 110202	6,35	2,38	0,20	DP1010-0451	DP2010-0451					1-edge tipped
	VBGW 110204	6,35	2,38	0,40	DP1010-0452	DP2010-0452					1-edge tipped
	VBGW 110208	6,35	2,38	0,80	DP1010-0453	DP2010-0453					1-edge tipped
	VBGW 160401	9,525	4,76	0,10	DP1010-0608	DP2010-0608					1-edge tipped
	VBGW 160402	9,525	4,76	0,20	DP1010-0454	DP2010-0454					1-edge tipped
	VBGW 160404	9,525	4,76	0,40	DP1010-0455	DP2010-0455					1-edge tipped
	VBGW 160408	9,525	4,76	0,80	DP1010-0456	DP2010-0456					1-edge tipped
	VBGW 160412	9,525	4,76	1,20	DP1010-0457	DP2010-0457					1-edge tipped

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.

 Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com

 All our products are also available in the online shop.
Visit us at Diamond-tools24.com




Scan me!

VCGT - Positive Rake Angle

edge tipped



FN - Positive Rake Angle

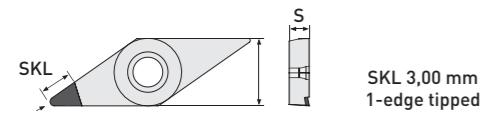

Standard	ISO Code	IC	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version		
								SKL 3,00 mm 1-edge tipped					
	VCGT 070201	3,97	2,38	0,10	DP1010-0131	DP2010-0133					1-edge tipped		
	VCGT 070202	3,97	2,38	0,20	DP1010-0119	DP2010-0119					1-edge tipped		
	VCGT 070204	3,97	2,38	0,40	DP1010-0120	DP2010-0120					1-edge tipped		
	VCGT 070208	3,97	2,38	0,80	DP1010-0132	DP2010-0134					1-edge tipped		
	VCGT 110301	6,35	3,18	0,10	DP1010-0609	DP2010-0609					1-edge tipped		
	VCGT 110302	6,35	3,18	0,20	DP1010-0121	DP2010-0121					1-edge tipped		
	VCGT 110304	6,35	3,18	0,40	DP1010-0122	DP2010-0122					1-edge tipped		
	VCGT 110308	6,35	3,18	0,80	DP1010-0123	DP2010-0123					1-edge tipped		
	VCGT 160401	9,525	4,76	0,10	DP1010-0610	DP2010-0610					1-edge tipped		
	VCGT 160402	9,525	4,76	0,20	DP1010-0124	DP2010-0124					1-edge tipped		
	VCGT 160404	9,525	4,76	0,40	DP1010-0125	DP2010-0125					1-edge tipped		
	VCGT 160408	9,525	4,76	0,80	DP1010-0126	DP2010-0126					1-edge tipped		
	VCGT 160412	9,525	4,76	1,20	DP1010-0127	DP2010-0127					1-edge tipped		

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.

VCGT - Chip Breaker

edge tipped



FN - neutral - Chip breaker for finishing (SPL-F) or roughing (SPL-R)

Standard	ISO Code	IC	S	R	PKD Diamant	Item No.	PKD Diamant	Item No.	Version		
									SKL 3,00 mm 1-edge tipped	SKL 3,00 mm 1-edge tipped	SKL 3,00 mm 1-edge tipped
	VCGT 070202	3,97	2,38	0,20	DP1011-0060		DP1012-0060		1-edge tipped		
	VCGT 070204	3,97	2,38	0,40	DP1011-0061		DP1012-0061		1-edge tipped		
	VCGT 070208	3,97	2,38	0,80	DP1011-0075		DP1012-0075		1-edge tipped		
	VCGT 110302	6,35	3,18	0,20	DP1011-0062		DP1012-0062		1-edge tipped		
	VCGT 110304	6,35	3,18	0,40	DP1011-0063		DP1012-0063		1-edge tipped		
	VCGT 110308	6,35	3,18	0,80	DP1011-0064		DP1012-0064		1-edge tipped		
	VCGT 160402	9,525	4,76	0,20	DP1011-0065		DP1012-0065		1-edge tipped		
	VCGT 160404	9,525	4,76	0,40	DP1011-0066		DP1012-0066		1-edge tipped		
	VCGT 160408	9,525	4,76	0,80	DP1011-0067		DP1012-0067		1-edge tipped		

Also available in CVD and CBN with Chip breaker on request.

Subject to technical changes.



Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com



All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!

VCGW

edge tipped



FN - neutral

Minitools	ISO Code	IC	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version	
								SKL 2,00 mm 2-edge tipped				
	VCGW 050101	3,10	1,59	0,10		DP2010-0561	DP1110-1498		2-edge tipped			
	VCGW 050102	3,10	1,59	0,20		DP2010-0562	DP1110-1500		2-edge tipped			
	VCGW 050104	3,10	1,59	0,40		DP2010-0563	DP1110-1502		2-edge tipped			

! You will find the matching MiniTool holder in our boring bar catalog (03) on page 29.



VXGW

edge tipped

FN - neutral


DTS - Specials	ISO Code	IC	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version	
								SKL 3,00 mm 1-edge tipped				
	VXGW 160401	9,525	4,76	0,10		DP2010-0310						1-edge tipped
	VXGW 160402	9,525	4,76	0,20		DP2010-0311						1-edge tipped
	VXGW 160404	9,525	4,76	0,40		DP2010-0312						1-edge tipped
	VXGW 160408	9,525	4,76	0,80		DP2010-0313						1-edge tipped

! The matching holders on request, available from stock.

Standard	ISO Code	IC	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Item No.	Item No.	Item No.	Version	
								SKL 3,00 mm 1-edge tipped				
	VCGW 070201	3,97	2,38	0,10	DP1010-0135	DP2010-0135						1-edge tipped
	VCGW 070202	3,97	2,38	0,20	DP1010-0110	DP2010-0110						1-edge tipped
	VCGW 070204	3,97	2,38	0,40	DP1010-0111	DP2010-0111						1-edge tipped
	VCGW 070208	3,97	2,38	0,80	DP1010-0136	DP2010-0136						1-edge tipped
	VCGW 110301	6,35	3,18	0,10	DP1010-0611	DP2010-0611						1-edge tipped
	VCGW 110302	6,35	3,18	0,20	DP1010-0112	DP2010-0112						1-edge tipped
	VCGW 110304	6,35	3,18	0,40	DP1010-0113	DP2010-0113						1-edge tipped
	VCGW 110308	6,35	3,18	0,80	DP1010-0114	DP2010-0114						1-edge tipped
	VCGW 160401	9,525	4,76	0,10	DP1010-0612	DP2010-0612						1-edge tipped
	VCGW 160402	9,525	4,76	0,20	DP1010-0115	DP2010-0115						1-edge tipped
	VCGW 160404	9,525	4,76	0,40	DP1010-0116	DP2010-0116						1-edge tipped
	VCGW 160408	9,525	4,76	0,80	DP1010-0117	DP2010-0117						1-edge tipped
	VCGW 160412	9,525	4,76	1,20	DP1010-0118	DP2010-0118						1-edge tipped

DTS-Specials Plan/Axial Machining:

Our VXGW cutting insert is designed for face and axial machining of contours from a minimum outside diameter of 10mm, using the maximum groove depth of 1.5mm.

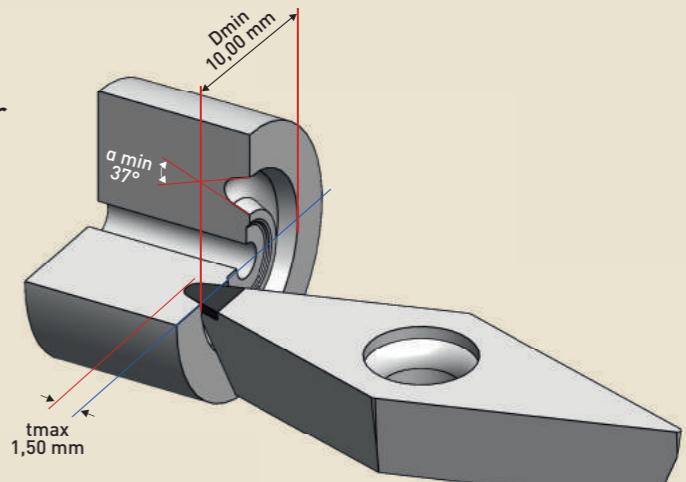

It is tipped with CVD-D as standard, but is of course also available with PCD or Ultra-Diamond on request.

Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
- CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites (CFRP, GFRP, MMC), Copper, Plastics, PEEK, Titanium (Finishing) ...
- UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

You will find further application ranges in the detailed overview on page 7.

Special tools on request for you!
Please send inquiries to info@Diamond-toolingsystems.com


All our products are also available in the online shop.
Visit us at Diamond-tools24.com



Scan me!



FN - neutral

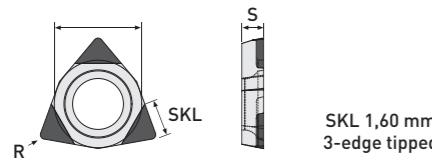

SKL 1,60 mm
3-edge tipped

ISO Code	IC	S	R	PKD Diamant	CVD-D Diamant	Ultra Diamant	Version
				Item No.	Item No.	Item No.	
WCGW 020101	3,97	1,59	0,10		DP2010-0571	DP1110-1504	3-edge tipped
WCGW 020102	3,97	1,59	0,20		DP2010-0572	DP1110-1506	3-edge tipped
WCGW 020104	3,97	1,59	0,40		DP2010-0573	DP1110-1508	3-edge tipped

! You will find the matching MiniTool holder in our boring bar catalog (03) on page 34.

Your Notes



Application range:

- PCD Aluminum <10% Si, Brass, Brass lead-free, Graphite coarse-grained, Titanium (Roughing) ...
 - CVD-D Acrylic, Aluminum >10% Si, Carbide, Ceramics, Composites [CFRP, GFRP, MMC], Copper, Plastics, PEEK, Titanium (Finishing) ...
 - UltraDia. Glass Materials, Sintered Ceramic Materials, Carbides <12%Co, Carbides with Ni Binder, highly abrasive, difficult-to-machine materials ...

Cutting Parameters

for our Diamond indexable inserts

Material	Diamond Indexable Inserts											
	PCD						CVD-D					
	V _c [m/min]		a _p [mm]		F [mm/U]		V _c [m/min]		a _p [mm]		F [mm/U]	
Material	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.
Acryl (PMMA)	100	2.000	0,01	2,80	0,01	0,40	200	5.000	0,01	2,60	0,01	0,50
Al Si <10%	300	3.000	0,01	2,80	0,01	0,50	200	5.000	0,01	2,80	0,01	0,60
Al Si >10%							150	4.000	0,01	2,80	0,01	0,40
Graphit	150	1.000	0,01	2,80	0,02	0,50	80	1.500	0,01	2,80	0,01	0,60
Gold, Silver, Platin							80	3.000	0,01	2,60	0,01	0,50
Glas, GlasCeramic												
Carbide G-Type <15% Co												
Carbide G-Type >15% Co												
Carbide K-Type <15% Co												
Carbide K-Type >15% Co												
Carbide with Ni-Binder												
Ceramics, Zirconium												
Plastics							100	1.500	0,01	2,80	0,01	0,60
Copper, Copper Alloy	100	2.000	0,01	2,60	0,01	0,40	60	3.500	0,01	2,60	0,005	0,60
Magnesium	200	3.000	0,01	2,80	0,01	0,30	80	4.500	0,01	2,60	0,01	0,40
Brass, Brass lead-free	120	2.000	0,01	2,60	0,01	0,40	80	3.000	0,01	2,60	0,01	0,50
PEEK	80	3.000	0,01	2,60	0,01	0,50						
Titanium	80	150	0,01	0,50	0,01	0,30	100	200	0,01	0,50	0,01	0,40
Composites Materials GFK / CFK / MMC							80	3.000	0,01	2,60	0,01	0,50
Tungsten Copper							40	1.200	0,01	2,00	0,01	0,30

Material	Diamond Indexable Inserts											
	UltraDiamond						Cooling					
	V _c [m/min]		a _p [mm]		F [mm/U]		Dry		Air		Emulsion	
Material	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	Oil	MQL
Acryl (PMMA)	80	5.000	0,01	2,60	0,005	0,50	5. Choice	4. Choice	1. Choice	2. Choice	3. Choice	
Al Si <10%							5. Choice	4. Choice	1. Choice	2. Choice	3. Choice	
Al Si >10%									1. Choice	2. Choice	3. Choice	
Graphit							2. Choice	1. Choice				
Gold, Silver, Platin									3. Choice	1. Choice		2. Choice
Glas, GlasCeramic												
Carbide G-Type <15% Co												
Carbide G-Type >15% Co												
Carbide K-Type <15% Co												
Carbide K-Type >15% Co												
Carbide with Ni-Binder												
Ceramics, Zirconium												
Plastics									3. Choice	1. Choice		2. Choice
Copper, Copper Alloy									4. Choice	1. Choice	2. Choice	3. Choice
Magnesium									4. Choice	1. Choice	2. Choice	3. Choice
Brass, Brass lead-free									5. Choice	4. Choice	1. Choice	2. Choice
PEEK									4. Choice	1. Choice	2. Choice	3. Choice
Titanium									4. Choice	1. Choice	2. Choice	3. Choice
Composites Materials GFK / CFK / MMC									4. Choice	1. Choice	2. Choice	3. Choice
Tungsten Copper									3. Choice	1. Choice		2. Choice

Cutting Parameters

for our Diamond inserts with Chip breaker



		Chip Breaker											
Material	R	Chip breaker F (Finishing chip breaker)						Chip breaker R (Roughing chip breaker)					
		V _c [m/min]		a _p [mm]		F [mm/U]		V _c [m/min]		a _p [mm]		F [mm/U]	
		min.	max.	min.	max.	min.	max.	min.	max.	min.	max.	min.	max.
AlSi <3%	0,2	100	800	0,01	2,00	0,02	0,10	100	800	0,12	2,80	0,03	0,10
	0,4	100	800	0,01	2,00	0,04	0,20	100	800	0,12	2,80	0,03	0,20
	0,8	100	800	0,01	2,00	0,05	0,40	100	800	0,12	2,80	0,06	0,40
	1,2	100	800	0,01	2,00	0,05	0,40	100	800	0,12	2,80	0,08	0,60
AlSi <12%	0,2	80	600	0,01	2,00	0,02	0,10	80	800	0,12	2,80	0,08	0,10
	0,4	80	600	0,01	2,00	0,04	0,20	80	800	0,12	2,80	0,10	0,20
	0,8	80	600	0,01	2,00	0,05	0,40	80	800	0,15	2,80	0,15	0,40
	1,2	80	600	0,01	2,00	0,05	0,60	80	800	0,20	2,80	0,20	0,60
Copper, Bronze	0,2	80	600	0,01	2,00	0,02	0,10	80	600	0,12	2,80	0,08	0,10
	0,4	80	600	0,01	2,00	0,04	0,20	80	600	0,15	2,80	0,10	0,20
	0,8	80	600	0,01	2,00	0,05	0,40	80	600	0,15	2,80	0,20	0,40
	1,2	80	600	0,01	2,00	0,05	0,60	80	600	0,20	2,80	0,25	0,60
Brass lead-free	0,2	80	600	0,01	2,00	0,02	0,10	80	600	0,12	2,80	0,05	0,10
	0,4	80	800	0,01	2,00	0,04	0,20	80	800	0,12	2,80	0,07	0,20
	0,8	80	800	0,01	2,00	0,05	0,40	80	800	0,15	2,80	0,07	0,40
	1,2	80	800	0,01	2,00	0,05	0,60	80	800	0,20	2,80	0,12	0,60
MMC	0,2	100	500	0,01	2,00	0,02	0,10	100	500	0,12	2,80	0,05	0,10
	0,4	100	500	0,01	2,00	0,04	0,20	100	500	0,12	2,80	0,06	0,20
	0,8	100	500	0,01	2,00	0,05	0,40	100	500	0,20	2,80	0,10	0,40
	1,2	100	500	0,01	2,00	0,05	0,60	100	500	0,25	2,80	0,15	0,60

Cooling recommended

In machining with Diamond inserts, the right cooling is a key to successful machining.
Here you will find our recommendation:

Material	Cooling				
	Dry	Air	Emulsion	Oil	MQL
AlSi <3%			1. Choice	2. Choice	3. Choice
AlSi <12%			1. Choice	2. Choice	3. Choice
Copper, Bronze			1. Choice	2. Choice	3. Choice
Brass lead free	5. Choice	4. Choice	1. Choice	2. Choice	3. Choice
MMC		2. Choice	1. Choice		



If you have any further technical questions, please do not hesitate to contact us


by phone or e-mail!

Phone: +49(0)6301 32011-0

Mail: info@Diamond-toolingsystems.com

Formulas

Turning

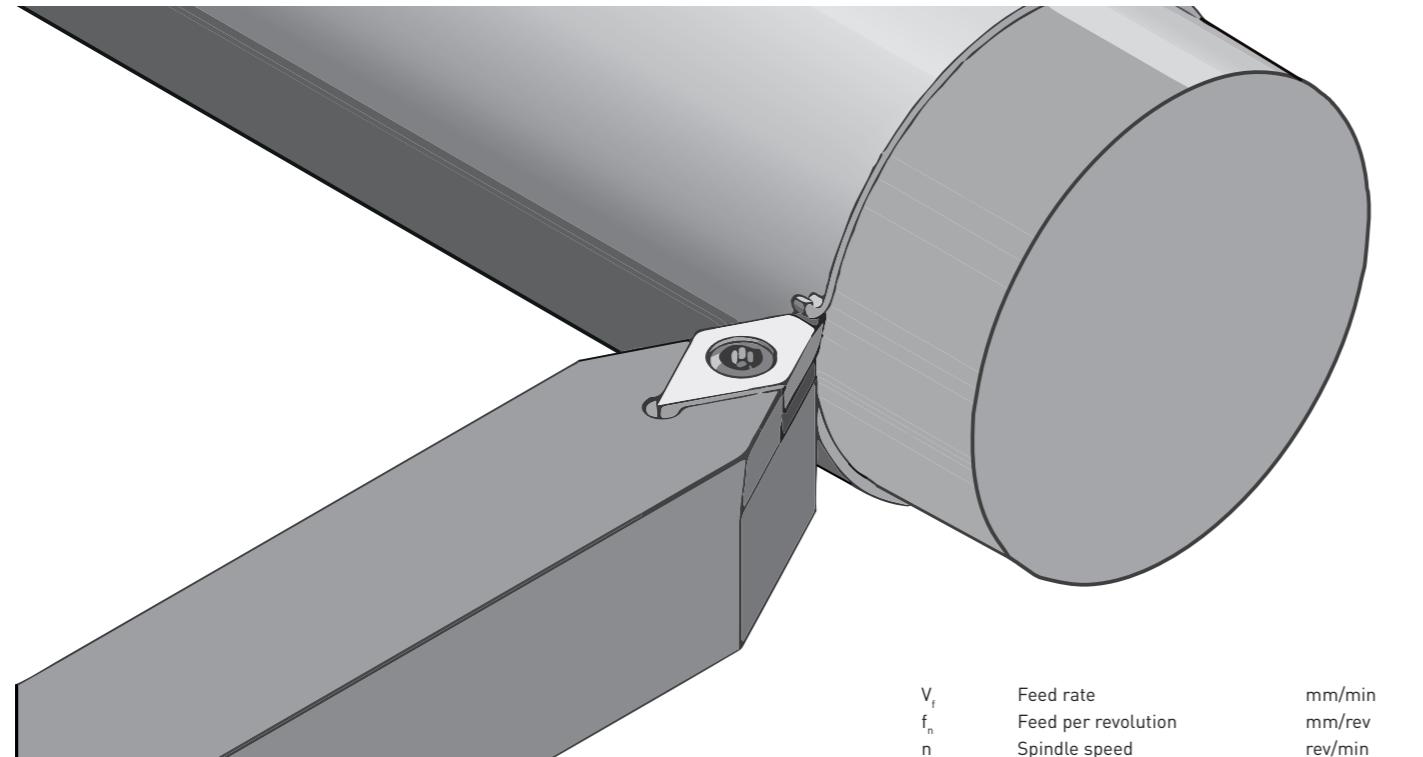

V_f	Feed rate	mm/min
f_n	Feed per revolution	mm/rev
n	Spindle speed	rev/min
v_c	Cutting speed	m/min
D_c	Cutter diameter	mm
t_c	Cutting Time	min
l_m	Cutting length	mm
Q	Stock removal rate	cm³/min
a_p	Cutting depth	mm

► Cutting speed

$$V_c = \frac{D_c \times \pi \times n}{1000} \quad [\text{m/min}]$$

► Spindle speed

$$n = \frac{v_c \times 1000}{\pi \times D_c} \quad [\text{U/min}]$$

► Feed per revolution

$$f_n = \frac{V_f}{n} \quad [\text{mm/U}]$$

► Cutting time


$$t_c = \frac{l_m}{f_n \times n} \quad [\text{min}]$$

► Stock removal rate

$$Q = v_c \times a_p \times f_n \quad [\text{cm}^3/\text{min}]$$

Your Notes

A large, empty grid for writing notes or calculations.

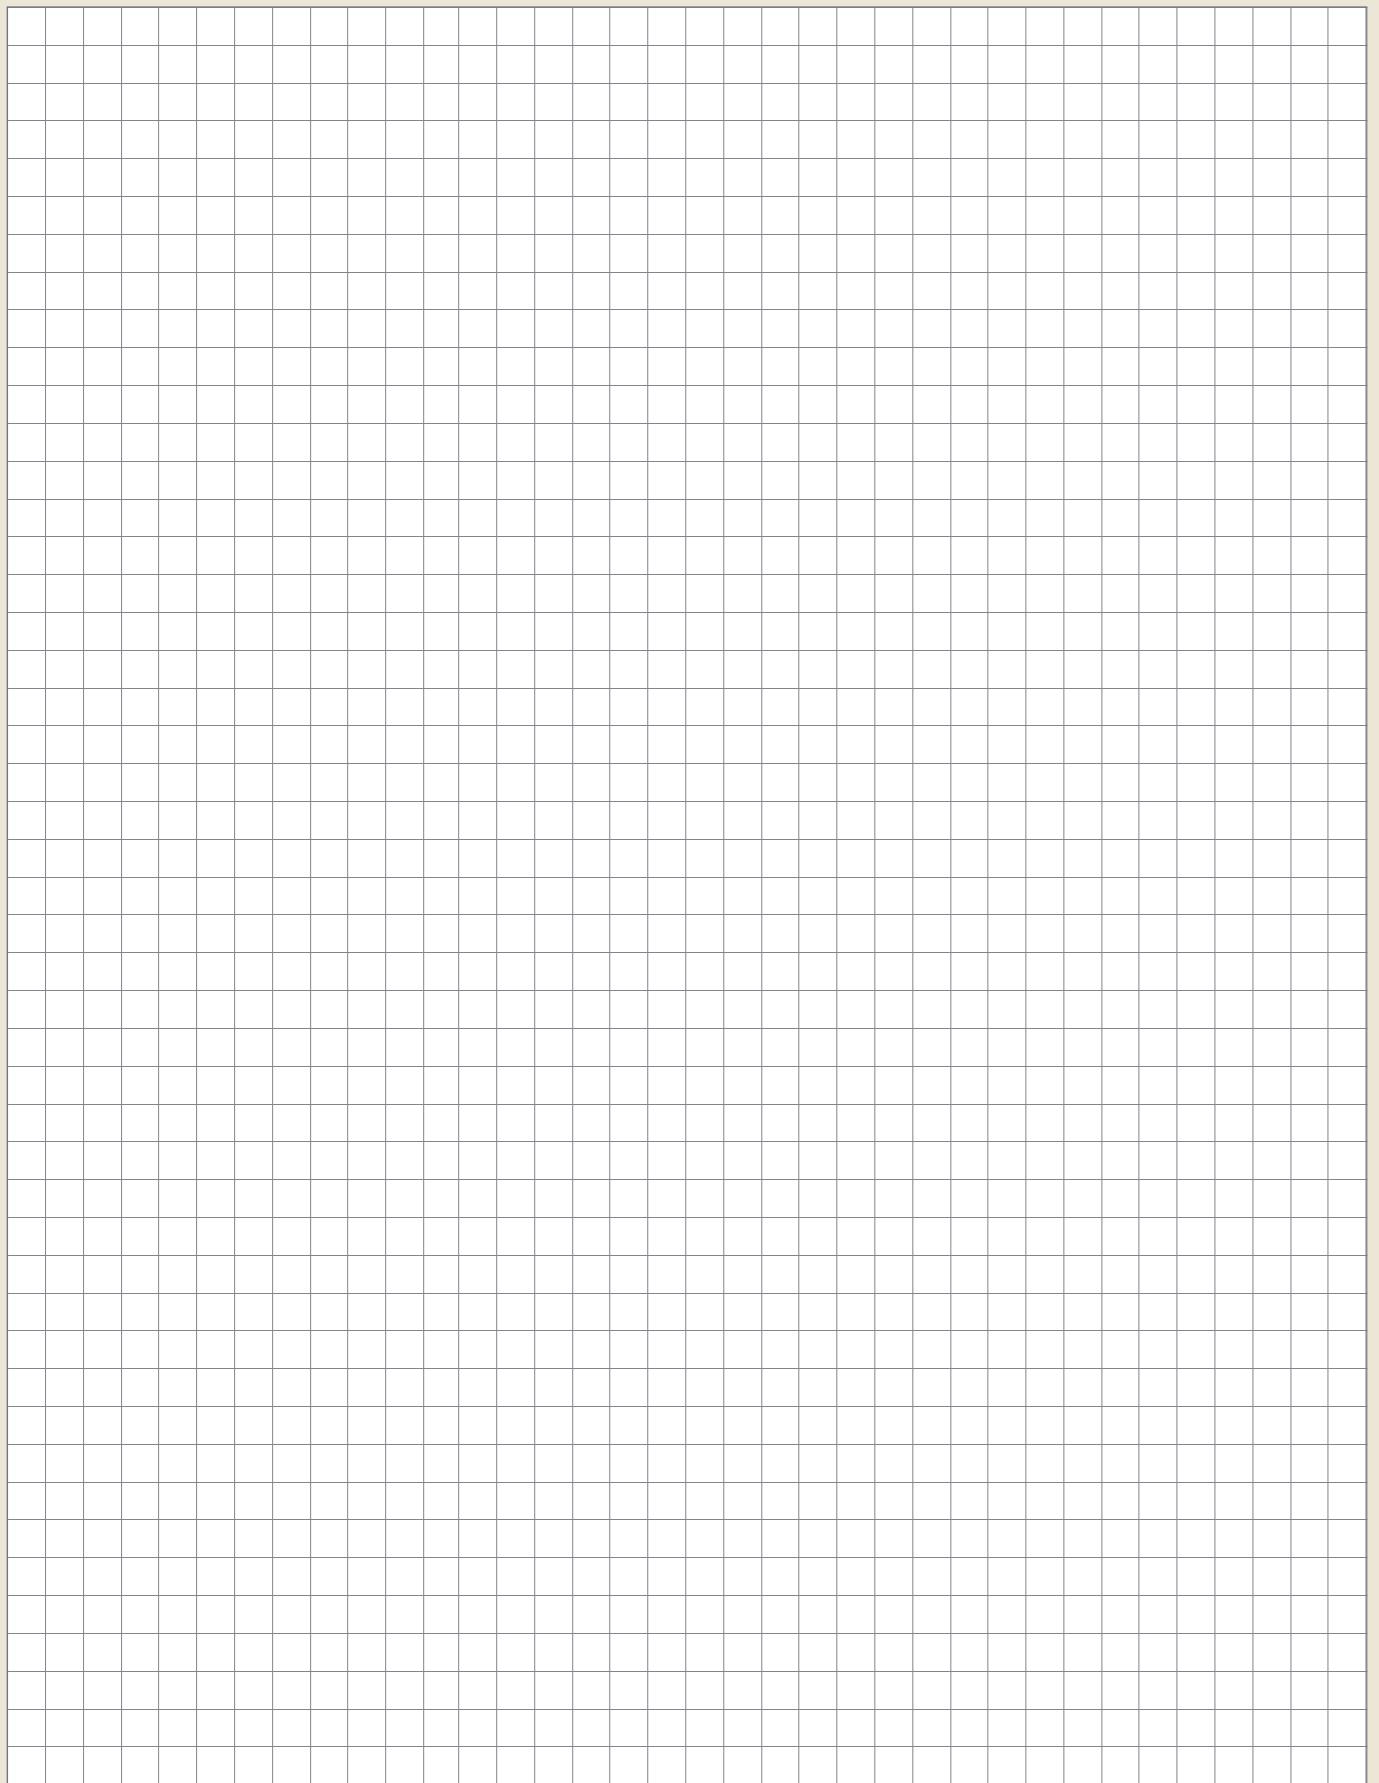

Copyright:

The reprint of our catalogs, copies of our flyers and newsletters or only excerpts such as illustrations, designs, technical information and design require the written permission of DTS GmbH. Copies or only excerpts such as illustrations, designs, technical information from our homepage and our online store are only permitted with the written consent of DTS GmbH.

All rights are reserved. Errors, misprints or printing errors do not entitle to claims. The pictorial and graphic representation of our tools do not necessarily have to correspond to the actual tool in all details.

We reserve the right to make production-related technical changes and changes to the delivery program. The cutting values given are guide values which must be adjusted according to the process environment.

Safety Instructions:

- ▶ DTS tools equipped with ultra-hard cutting edges are very sharp laser cut tools.
- ▶ Careful handling of the tools during unpacking and their use is recommended.
- ▶ Wearing protective gloves reduces the risk of injury.
- ▶ Material chipping and tool breakage may occur during machining, wearing safety glasses is recommended.
- ▶ Balanced holders are recommended for speeds above 10,000 rpm.
- ▶ We do not accept any responsibility for tools that have been modified, reground or used incorrectly and beyond their normal service life.
- ▶ Protective goggles are recommended when using DTS tools, sparks may also occur, make sure that no fire can occur.



Instagram



YouTube



LinkedIn



DTS Shop DTS Webseite



PASSION FOR DIAMOND

Hans-Geiger-Straße 11a · D-67661 Kaiserslautern

+49 (0) 6301 32011-0
+49 (0) 6301 32011-90

info@Diamond-toolingsystems.com

Homepage: www.Diamond-toolingsystems.com

Shop: www.Diamond-tools24.com