

A series for many different applications

**Optional with counter spindle,
as tailstock machine,
with two tool turrets
for simultaneous machining,
or as 5-axis turning milling centre
GOFuture BX**



Technical data:


Tool holder system
Tool turret

Bar capacity
Spindle speed
Control system
Dimensions L x W x H


Linear (set-up times optimised)
VDI 25 – 12 positions
optional 16 or 48 positions, optional with individual drive 6.000 rpm
Main spindle 16/26/32/42 mm
Main spindle and counter spindle up to 15.000 rpm
SIEMENS / Fanuc
Approx. 2,3 x 1,7 x 2,0 m

Machine variants:


B1

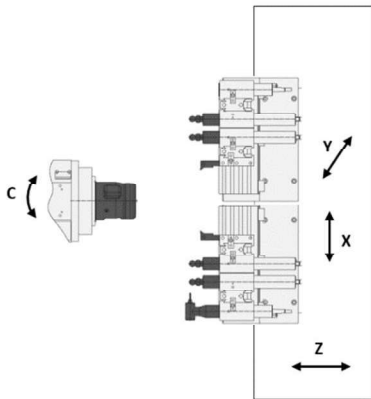


B2

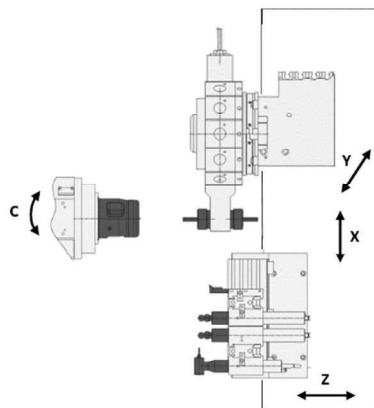

B3

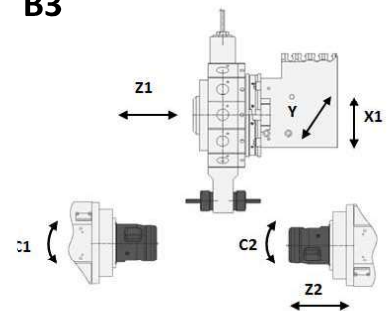

B4

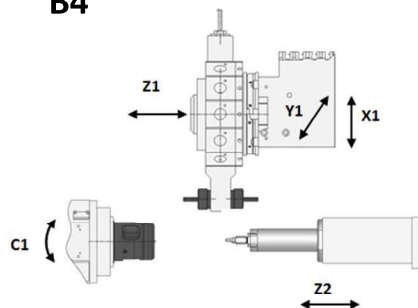

B6

