

One series for many different applications

Optional with counter spindle,
as tailstock machine,
with two tool turrets
for simultaneous machining,
or as 5-axis turning milling centre
GOFuture BX



Technical data:

Tool holder system
Tool turret

Linear (set-up times optimised)

VDI 25 – 12 positions

Optional 16 or 48 positions, optional with individual drive 6.000 rpm

Bar capacity

Main spindle 16/26/32/42 mm

Spindle speed

Main spindle and counter spindle up to 15.000 rpm

Control system


SIEMENS / Fanuc

Dimensions L x W x H


Approx. 2,3 x 1,7 x 2,0 m

Machine variants:


B1

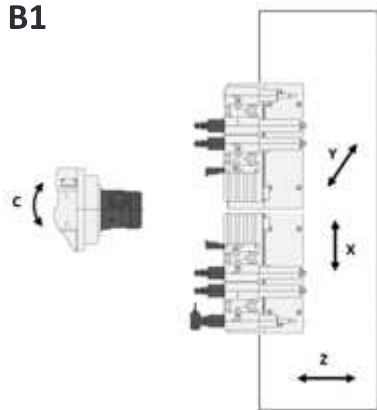


B2

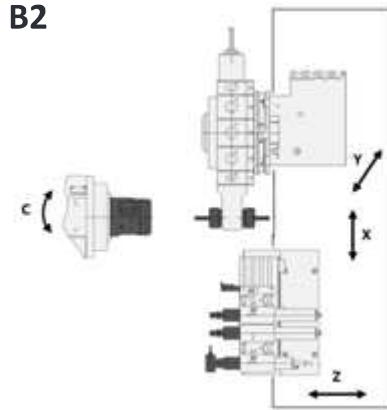

B3

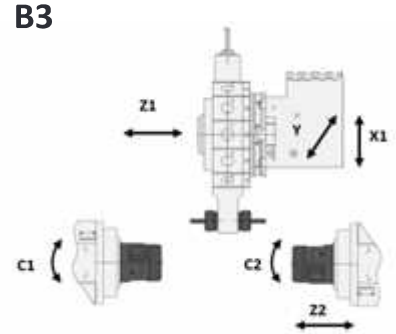

B4

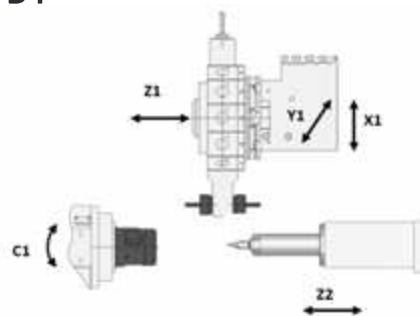

B6

